



MPCM303X, MPCM304X, MPCM306X, MPCM308X Series

SOP4, DC Input, Zero-Cross Photo TRIAC Optocoupler

■ Features

- High isolation 3750 VRMS
- DC input with zero-cross photo triac output
- Operating temperature range - 40 °C to 100 °C
- RoHS & REACH Compliance
- Halogen free
- MSL class 1
- Regulatory Approvals
 - UL - UL1577
 - VDE - EN60747-5-5(VDE0884-5)
 - CQC – GB4943.1-2022

■ Applications


- Solenoid/valve controls
- Lighting controls
- Motor controls
- Temperature controls
- Static AC power switches
- Solid state relays
- Interfacing microprocessors to 115 to 240VAC peripherals

■ Description

The MPCM303X, MPCM304X, MPCM306X and MPCM308X series combine an AlGaAs infrared emitting diode as the emitter which is optically coupled to a monolithic silicon zero-cross photo triac in a plastic SOP4 package with different lead forming options.

With the robust coplanar double mold structure, MPCM303X, MPCM304X, MPCM306X and MPCM308X series provide the most stable isolation feature.

■ Schematic

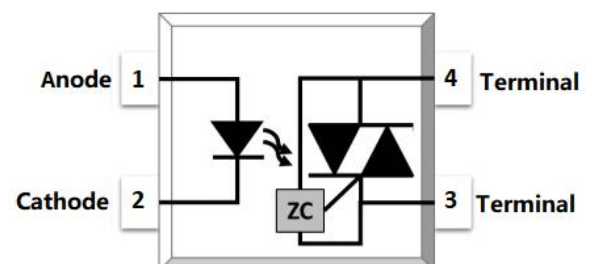



MPCM303X, MPCM304X, MPCM306X, MPCM308X Series

SOP4, DC Input, Zero-Cross Photo TRIAC Optocoupler

ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	VALUE	UNIT	NOTE
INPUT				
Forward Current	I_F	60	mA	
Reverse Voltage	V_R	6	V	
Junction Temperature	T_j	125	°C	
Input Power Dissipation	P_I	100	mW	
OUTPUT				
Off-state Output Terminal Voltage	MPCM303X	250	V	
	MPCM304X	400		
	MPCM306X	600		
	MPCM308X	800		
Peak Repetitive Surge Current PW=100μs, 120pps	I_{TSM}	1	A	
Junction Temperature	T_j	125	°C	
Output Power Dissipation	P_O	300	mW	
COMMON				
Total Power Dissipation	P_{tot}	400	mW	
Isolation Voltage	V_{iso}	3750	Vrms	1
Operating Temperature	T_{opr}	-40~100	°C	
Storage Temperature	T_{stg}	-55~150	°C	
Soldering Temperature	T_{sol}	260	°C	2

Note 1. AC For 1 Minute, R.H. = 40 ~ 60%

Note 2. For 10 seconds



MPCM303X,MPCM304X,MPCM306X,MPCM308X Series

SOP4, DC Input, Zero-Corss Photo TRIAC Optocoupler

ELECTRICAL OPTICAL CHARACTERISTICS at Ta=25°C

PARAMETER		SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION	NOTE
INPUT								
Forward Voltage		V_F	-	1.2	1.4	V	$I_F=10\text{mA}$	
Reverse Current		I_R	-	-	10	μA	$V_R=6\text{V}$	
Input Capacitance		C_{in}	-	8.5	250	pF	$V=0, f=1\text{kHz}$	
OUTPUT								
Peak Off-state Current, Either Direction		I_{DRM}	-	-	500	nA	$V_{DRM}=\text{Rated } V_{DRM}$ $I_F=0$	3
Peak On-state Current, Either Direction		V_{TM}	-	1.42	2.5	V	$I_{TM}=100\text{mA}$	
Critical Rate of Rise of Off-state Voltage Breakdown Voltage		dV/dt	1000	-	-	V	$V_{PEAK}=\text{Rated } V_{DRM}$	4
TRANSFER CHARACTERISTICS								
LED Trigger Current	MPCM3031,MPCM3041, MPCM3061,MPCM3081	I_{FT}	-	-	15	mA	Terminal Voltage = 3V $I_{TM}=100\text{mA}$	
	MPCM3032,MPCM3042, MPCM3062,MPCM3082		-	-	10			
	MPCM3032,MPCM3043, MPCM3063,MPCM3083		-	-	5			
Holding Current Saturation Voltage		I_H	-	450	-	μA		
Isolation Resistance		R_{iso}	10^{12}	10^{14}	-	Ω	DC500V, 40 ~ 60% R.H.	
Floating Capacitance		C_{IO}	-	0.4	1	pF	$V=0, f=1\text{MHz}$	
ZERO-CROSS CHARACTERISTICS								
Inhibit Voltage		V_{INH}	-	-	20	V	$I_F=\text{Rated } I_{FT}$	
Leakage in Inhibited State		I_{DRM2}	-	-	500	μA	$I_F=\text{Rated } I_{FT}$ $V_{DRM}=\text{Rated } V_{DRM}$	

Note3. Test voltage must be applied within dV/dt rating.

Note4. Refer to Fig.17 & Fig.18.

CHARACTERISTIC CURVES

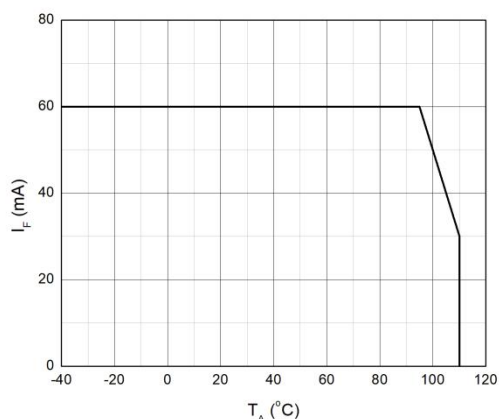


Fig.1 Forward Current vs. Ambient Temperature

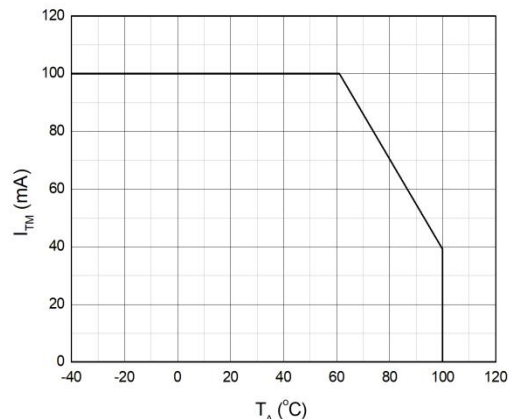


Fig.2 On-state Terminal Current vs. Ambient Temperature

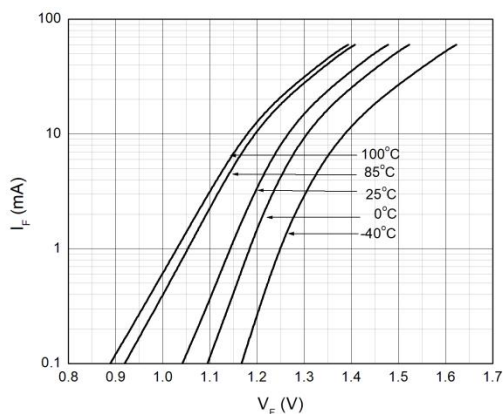


Fig.3 Forward Current vs. Forward Voltage

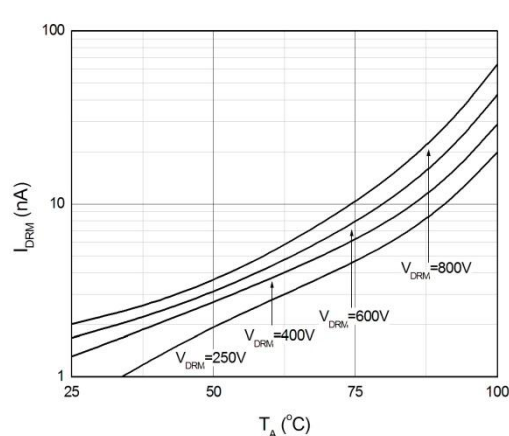


Fig.4 Off-state Terminal Current vs. Ambient Temperature

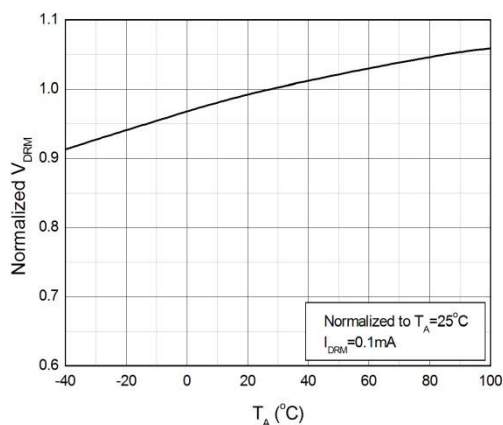


Fig.5 Normalized Off-state Terminal Voltage vs. Ambient Temperature

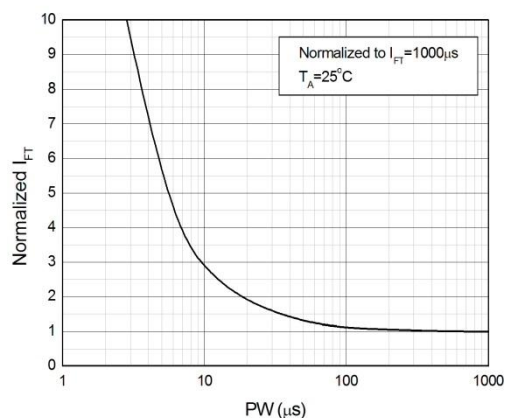


Fig.6 Normalized Trigger Current vs. LED Trigger Pulse Width

CHARACTERISTIC CURVES

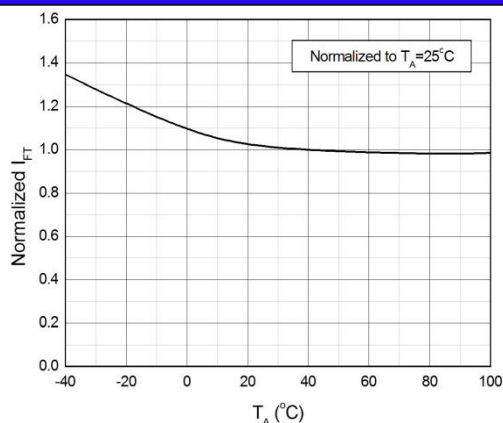


Fig.7 Normalized Trigger Current vs. Ambient Temperature

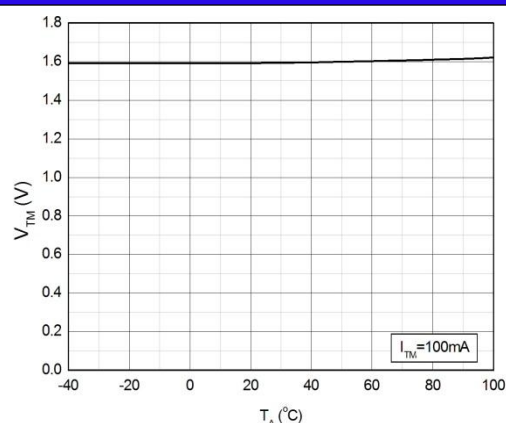


Fig.8 On-state Terminal Voltage vs. Ambient Temperature

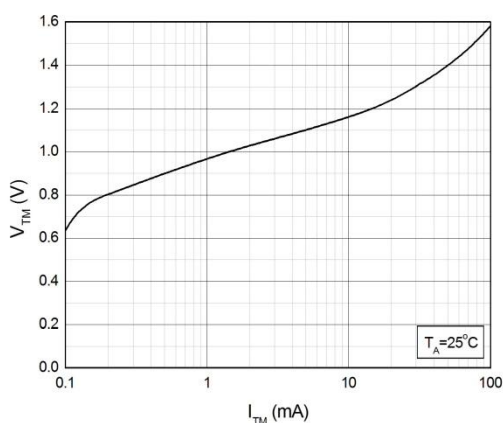


Fig.9 On-state Terminal Voltage vs. On-state Terminal Current

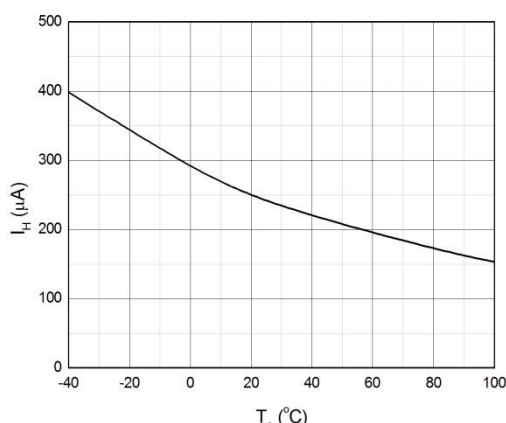


Fig.10 Holding Current vs. Ambient Temperature

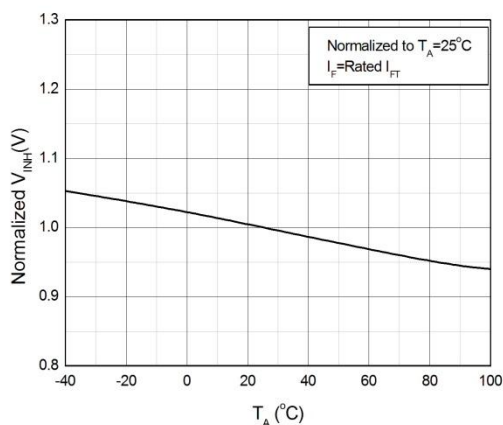


Fig.11 Normalized Inhibit Voltage vs. Ambient Temperature

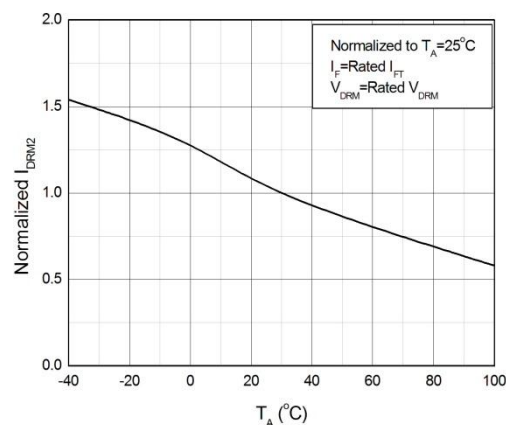


Fig.12 Normalized Leakage in Inhibit State vs. Ambient Temperature

CHARACTERISTIC CURVES

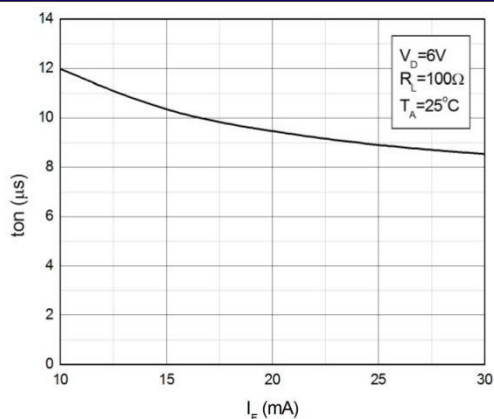


Fig.13 Turn On Time vs. Forward Current

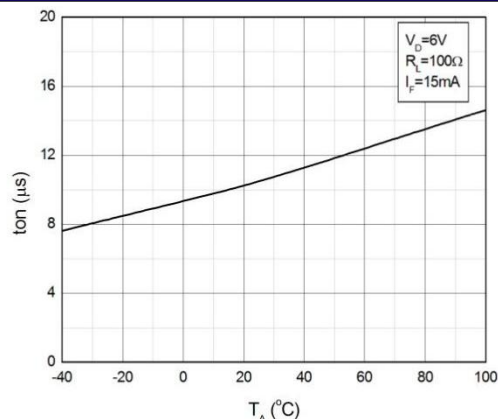


Fig.14 Turn On Time vs. Ambient Temperature

TEST CIRCUITS

Fig.15 Test Circuits of Turn On Time

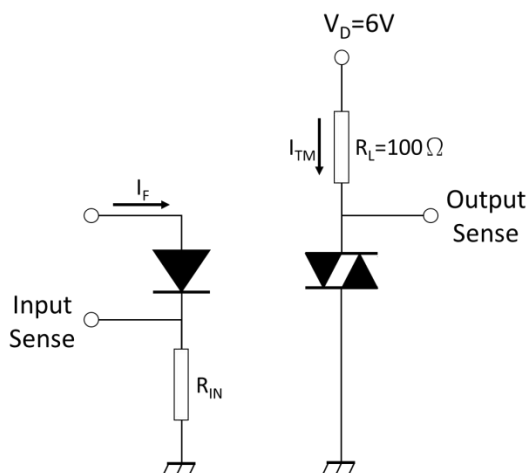


Fig.16 Waveforms of Turn On Time

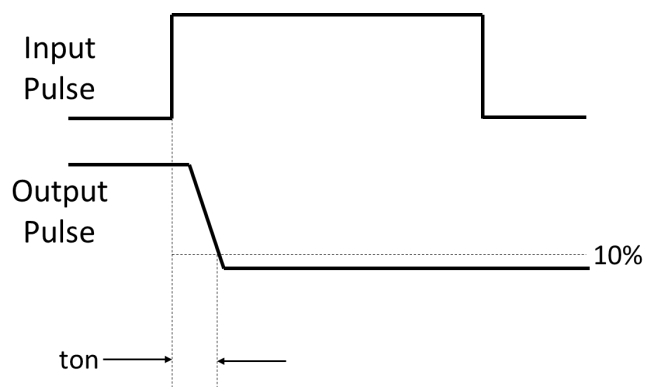


Fig.17 Test Circuits of dV/dt


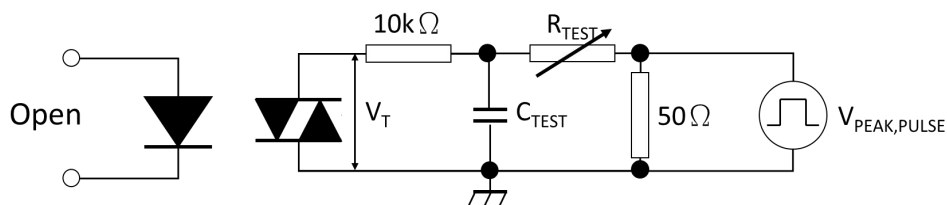


Fig.18 Waveforms of dV/dt




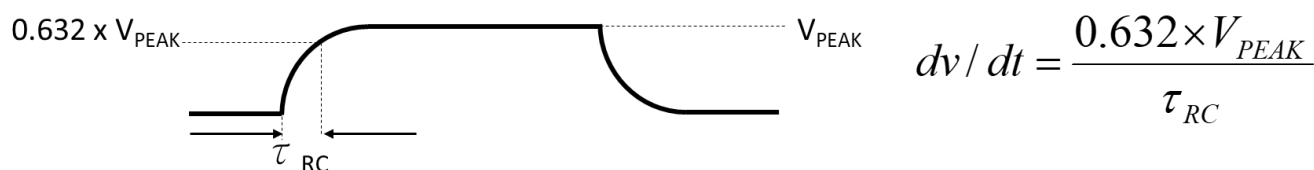


MPCM303X, MPCM304X, MPCM306X, MPCM308X Series

SOP4, DC Input, Zero-Cross Photo TRIAC Optocoupler

PACKAGE DIMENSIONS (Dimensions in mm unless otherwise stated)

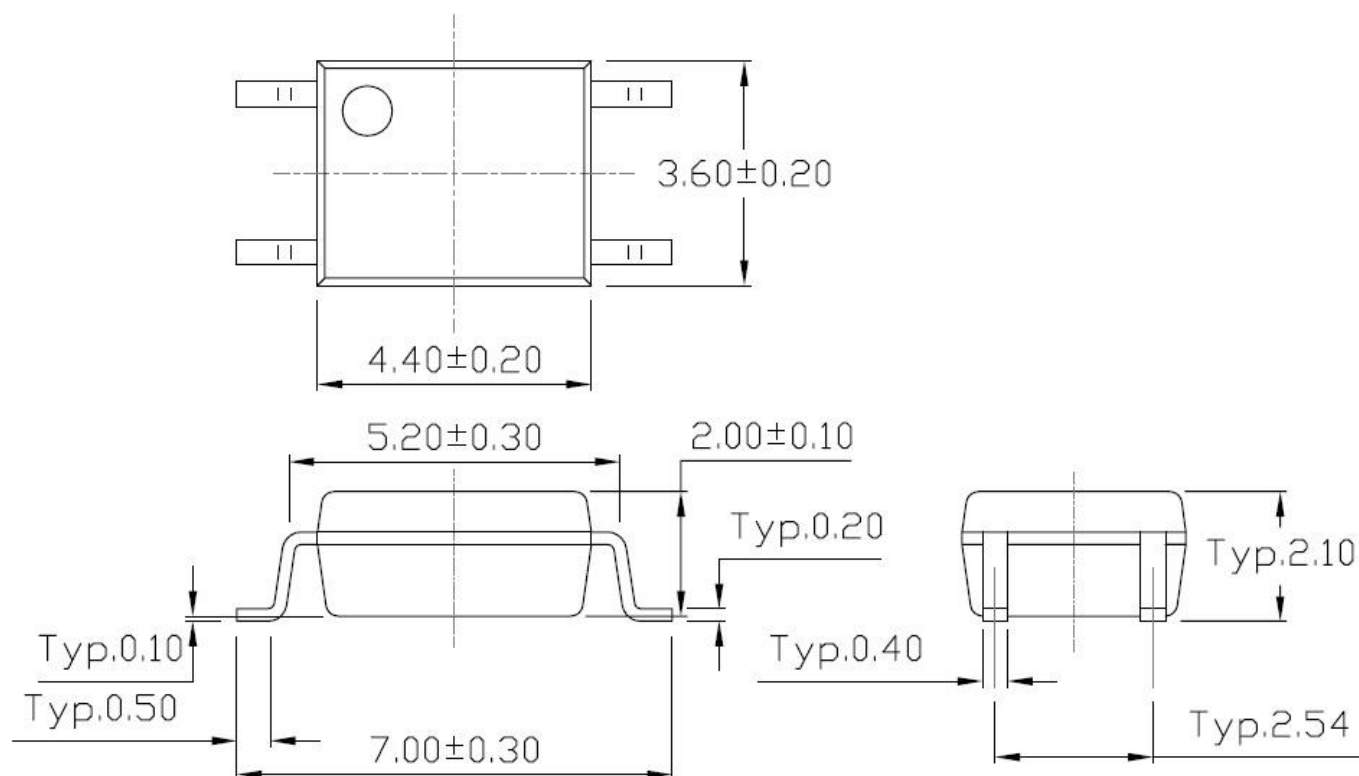


Recommended Solder Mask (Dimensions in mm unless otherwise stated)

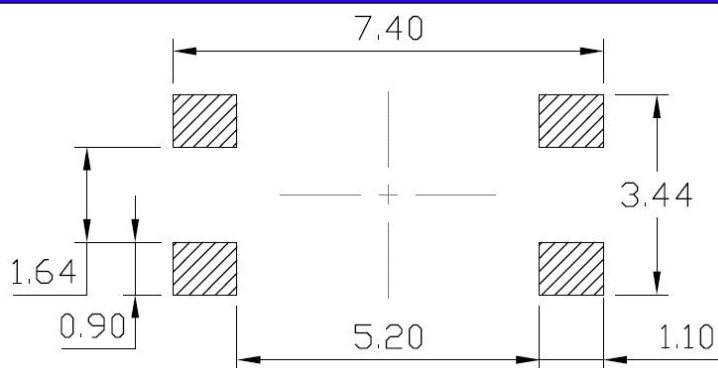


CARRIER TAPE SPECIFICATIONS (Dimensions in mm unless otherwise stated)

Option T1

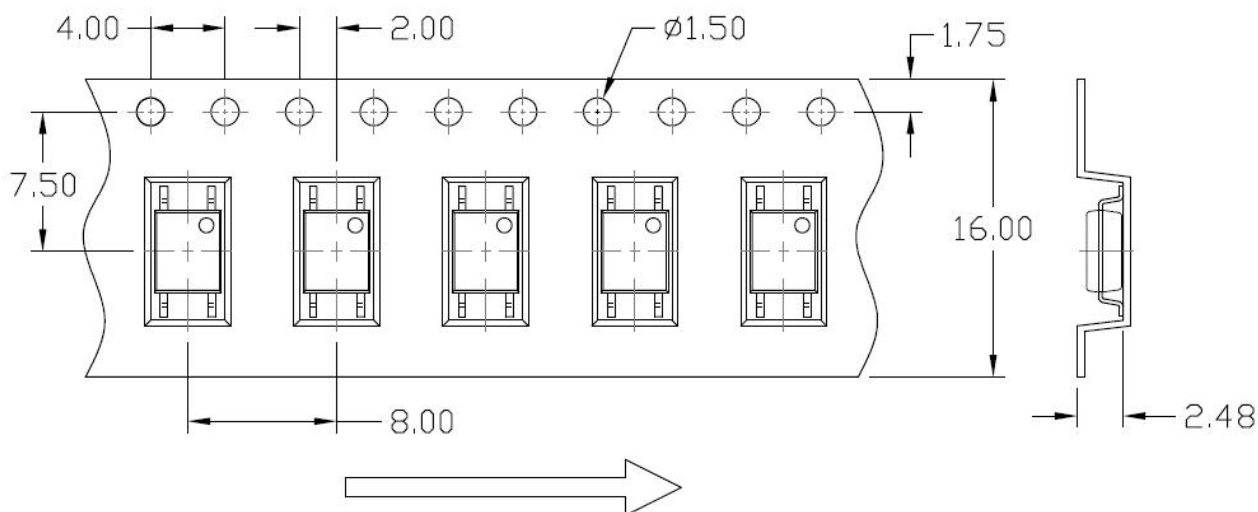

Option T2

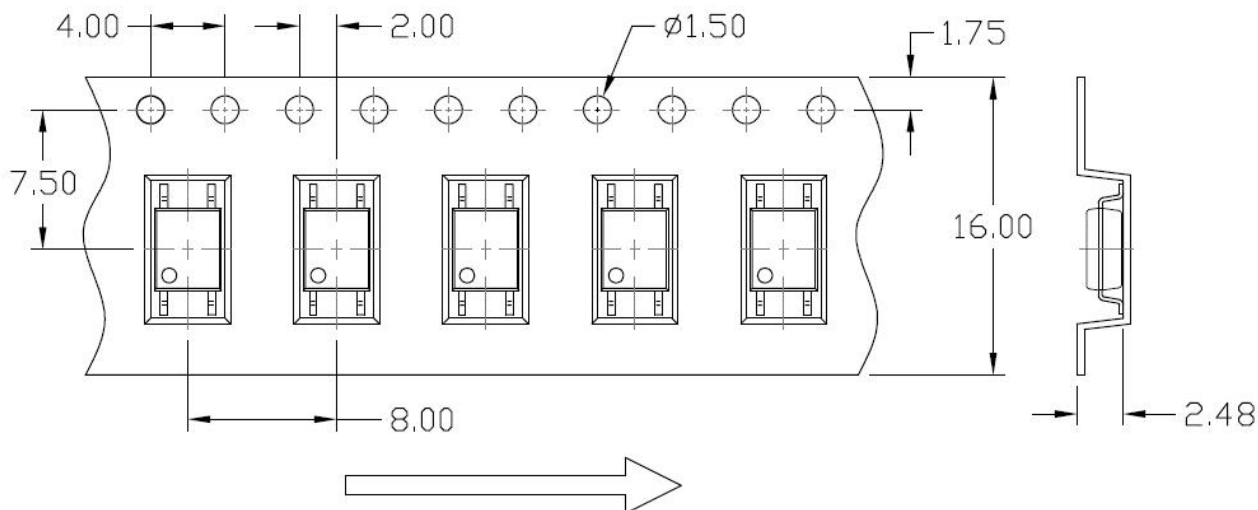




MPCM303X,MPCM304X,MPCM306X,MPCM308X Series ***SOP4, DC Input, Zero-Corss Photo TRIAC Optocoupler***

ORDERING AND MARKING INFORMATION

MARKING INFORMATION

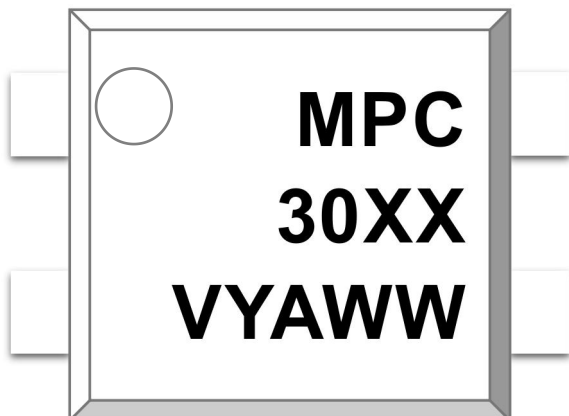

MPC :Company Abbr.
30XX :Part Number
V :VDE Option
Y :Fiscal Year
A :Manufacturing Code
WW :Work Week

ORDERING INFORMATION

MPCM30XX(Z)-GV


MPC – Company Abbr.
M – Package Type: SOP4
30XX – Part Number & Rank(31/32/33/41/42/43/61/62/63/81/82/83)
Z – Tape and Reel Option (T1/T2)
G – Material Option (G: Green, None: Non-Green)
V – VDE Option (V or None)

PACKING QUANTITY

Option	Quantity	Quantity – Inner box	Quantity – Outer box
T1	3000 Units/Reel	3 Reels/Inner box	5 Inner box/Outer box = 45k Units
T2	3000 Units/Reel	3 Reels/Inner box	5 Inner box/Outer box = 45k Units

REFLOW INFORMATION

REFLOW PROFILE

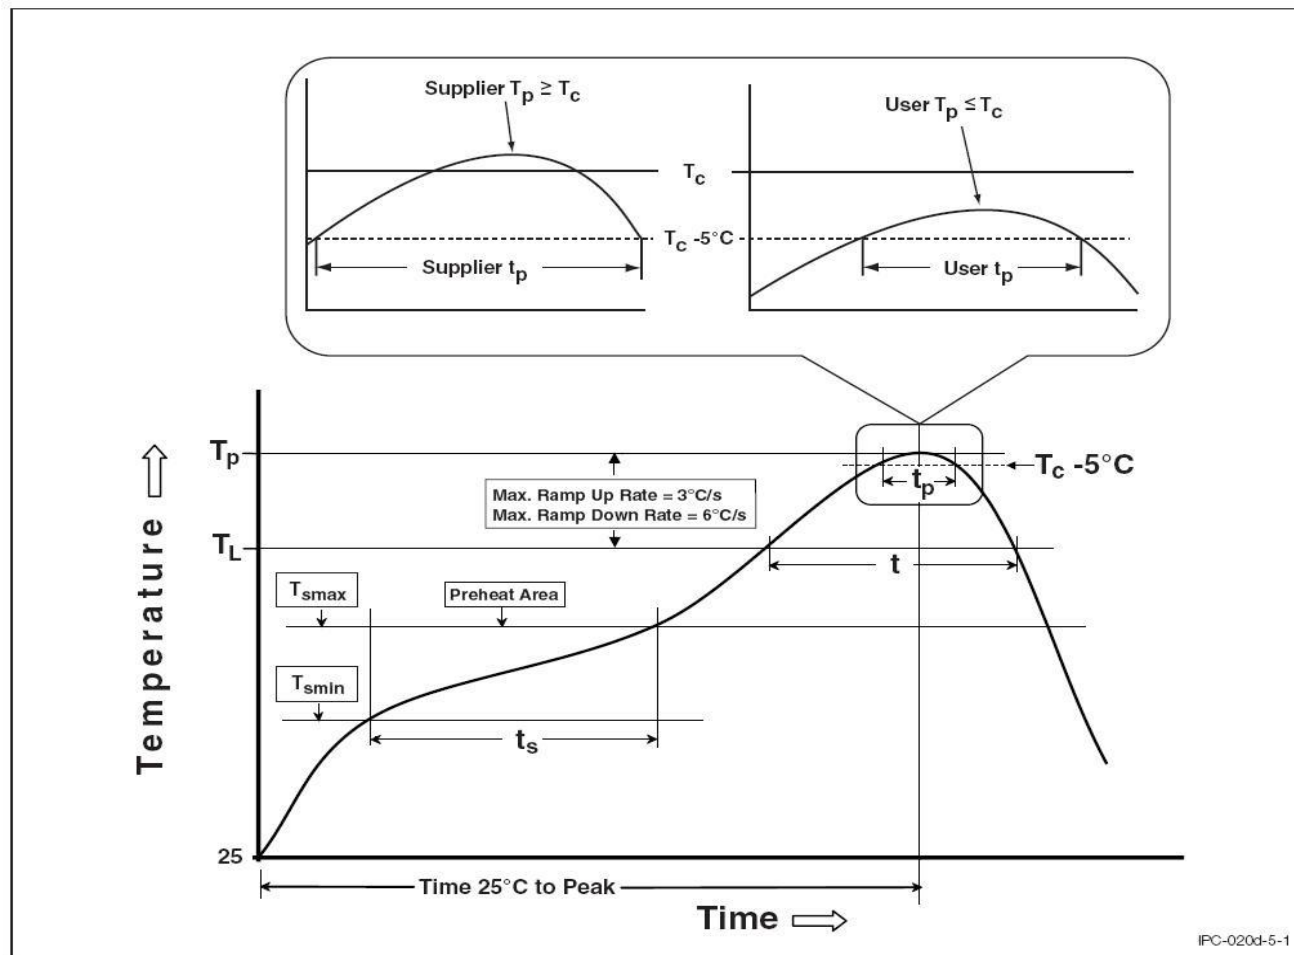


Profile Feature	Sn-Pb Assembly Profile	Pb-Free Assembly Profile
Temperature Min. (Tsm)	100	150°C
Temperature Max. (Tsmx)	150	200°C
Time (ts) from (Tsm to Tsmx)	60-120 seconds	60-120 seconds
Ramp-up Rate (tL to tP)	3°C/second max.	3°C/second max.
Liquidous Temperature (TL)	183°C	217°C
Time (tL) Maintained Above (TL)	60 – 150 seconds	60 – 150 seconds
Peak Body Package Temperature	235°C +0°C / -5°C	260°C +0°C / -5°C
Time (tP) within 5°C of 260°C	20 seconds	30 seconds
Ramp-down Rate (TP to TL)	6°C/second max	6°C/second max
Time 25°C to Peak Temperature	6 minutes max.	8 minutes max.



MPCM303X,MPCM304X,MPCM306X,MPCM308X Series **SOP4, DC Input, Zero-Corss Photo TRIAC Optocoupler**

TEMPERATURE PROFILE OF SOLDERING

WAVE SOLDERING (JESD22-A111 COMPLIANT)

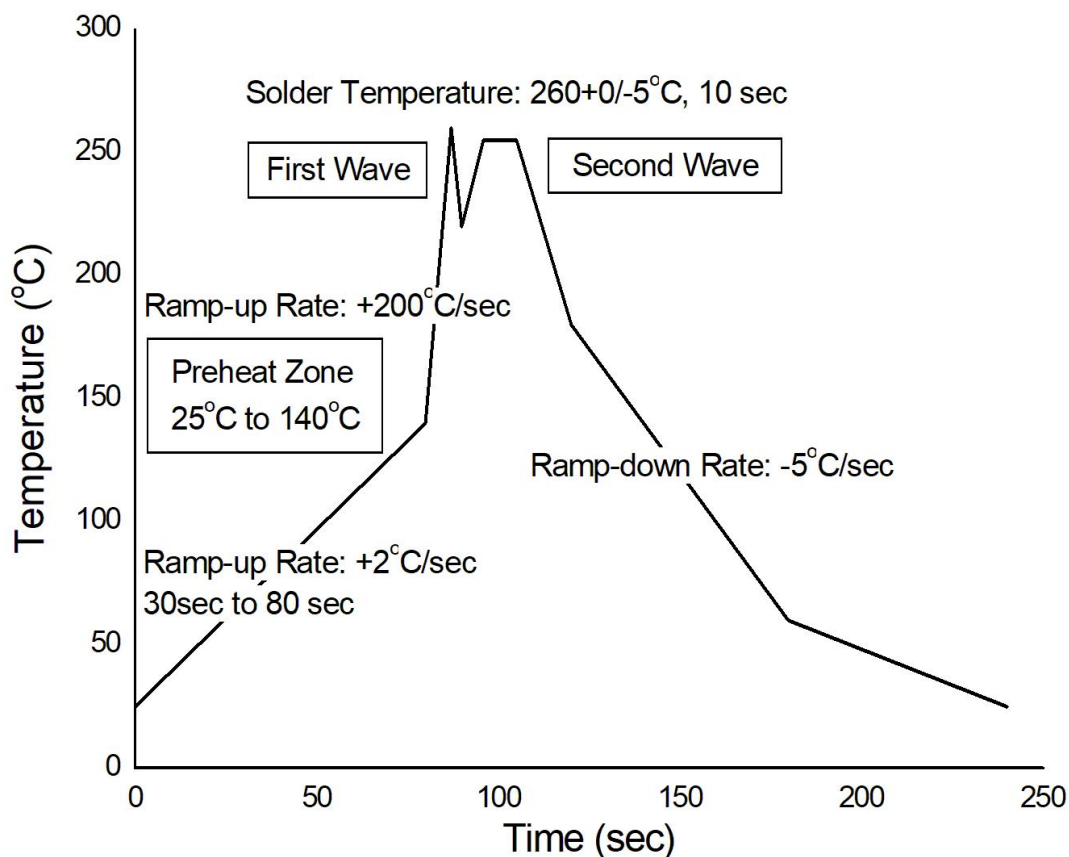

HAND SOLDERING BY SOLDERING IRON

Soldering Temperature	380+0/-5°C
Soldering Time	3 sec max.

- One time soldering is recommended for all soldering method.
- Do not solder more than three times for IR reflow soldering.



MPCM303X, MPCM304X, MPCM306X, MPCM308X Series

SOP4, DC Input, Zero-Cross Photo TRIAC Optocoupler

DISCLAIMER

- Our company is continually improving the quality, reliability, function and design. Our company reserves the right to make changes without further notices.
- The characteristic curves shown in this datasheet are representing typical performance which are not guaranteed.
- This product is not intended to be used for military, aircraft, automotive, medical, life sustaining or lifesaving applications or any other application which can result in human injury or death.
- Immerge unit's body in solder paste is not recommended.
- Discoloration might be occurred on the package surface after soldering, reflow or long-time use. It neither impacts the performance nor reliability.

■ **Revision History**

Version	Date	Subjects (major changes since last revision)
1.0	2018-12-21	Datasheet Complete
1.1	2023-07-05	Upgrade Datasheet