


Features

- ◆ 1500V, 4A, $R_{DS(ON)}(Typ.) = 3.5\Omega @ V_{GS} = 10V$.
- ◆ Low ON Resistance
- ◆ Fast Switching
- ◆ Low Gate Charge
- ◆ 100% Single Pulse avalanche energy Test

Application

- ◆ Power switch circuit of adaptor and charger

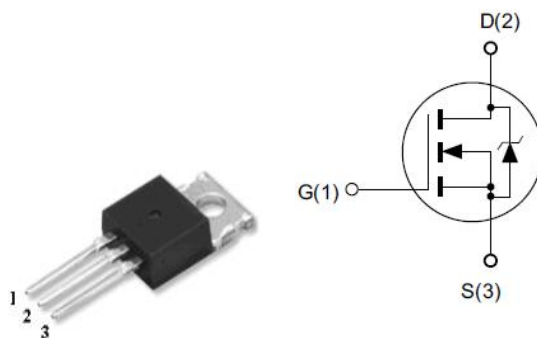

Absolute Maximum Ratings $T_c = 25^\circ C$ unless otherwise noted

Symbol	Parameter	Limit	Unit
V_{DS}	Drain-Source Voltage ^a	1500	V
V_{GS}	Gate-Source Voltage	± 30	V
I_D	Drain Current-Continuous, $T_c = 25^\circ C$	4	A
	Drain Current-Continuous, $T_c = 100^\circ C$	2.4	A
I_{DM}	Drain Current-Pulsed ^b	16	A
P_D	Maximum Power Dissipation @ $T_J = 25^\circ C$	160	W
EAS	Single Pulsed Avalanche Energy ^d	110	mJ
T_J, T_{STG}	Operating and Store Temperature Range	-55 to 150	$^\circ C$

Thermal Characteristics

Symbol	Parameter	Value	Unit
$R_{\theta JC}$	Thermal Resistance, Junction-Case Max.	0.78	$^\circ C/W$
$R_{\theta JA}$	Thermal Resistance Junction-Ambient Max.	62.5	$^\circ C/W$

Electrical Characteristics $T_J = 25^\circ C$ unless otherwise noted

Off Characteristics

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{GS} = 0V, I_D = 250\mu A$	1500	-	-	V
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS} = 1500V, V_{GS} = 0V$	-	-	1	μA
I_{GSS}	Forward Gate Body Leakage Current	$V_{DS} = 0V, V_{GS} = \pm 30V$	-	-	± 100	nA

On Characteristics

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS} = V_{GS}, I_D = 250\mu A$	3	-	5	V
$R_{DS(on)}$	Static Drain-Source On-Resistance ^c	$V_{GS} = 10V, I_D = 2A$	-	3.5	4.5	Ω

Dynamic Characteristics

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
Ciss	Input Capacitance	$V_{DS} = 25V$, $V_{GS} = 0V$, $f = 1.0MHz$	-	2646	-	pF
Coss	Output Capacitance		-	150	-	pF
Crss	Reverse Transfer Capacitance		-	16	-	pF

On Characteristics

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
$t_{d(on)}$	Turn-On Delay Time	$V_{DD} = 750V$, $I_D = 4A$, $R_G = 25\Omega$,	-	49.8	-	ns
t_r	Turn-On Rise Time		-	42.5	-	ns
$t_{d(off)}$	Turn-Off Delay Time		-	85	-	ns
t_f	Turn-Off Fall Time		-	56.2	-	ns
Qg	Total Gate Charge	$V_{DD} = 750V$, $I_D = 4A$, $V_{GS} = 10V$	-	49	-	nC
Qgs	Gate-Source Charge		-	13	-	nC
Qgd	Gate-Drain Charge		-	19	-	nC

Drain-Source Diode Characteristics

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
I_S	Drain-Source Diode Forward Continuous Current	$V_{GS} = 0V$	-	-	4	A
I_{SM}	Maximum Pulsed Current	$V_{GS} = 0V$	-	-	16	A
V_{SD}	Drain-Source Diode Forward Voltage	$V_{GS} = 0V$, $I_S = 4A$	-	-	1.4	V
t_{rr}	Reverse Recovery Time	$I_S = 4A$, $T_J = 25^\circ C$ $dI_F/dt = 100A/\mu s$, $V_{GS} = 0V$	-	896	-	ns
Qrr	Reverse Recovery Charge		-	8.5	-	uC

Notes:

- $T_J = +25^\circ C$ to $+150^\circ C$
- Repetitive rating; pulse width limited by maximum junction temperature.
- Pulse width $\leq 300\mu s$; duty cycle $\leq 2\%$
- $L = 10mH$, $V_{DD} = 50V$, $I_{AS} = 4.7A$, $R_G = 25\Omega$ Starting $T_J = 25^\circ C$

■ Package Information

