MPC07N65A

N-Channel Power MOSFET

Features

- 650V, 7A, $R_{DS(ON)}$(Typ.) = 1.15Ω@VGS = 10V.
- Low Crss
- Fast Switching
- 100% Avalanche Tested

TO-220



Application

- Adaptor
- Standby Power
- Switching power supply
- LED Power

Absolute Maximum Ratings T_C = 25° C unless otherwise noted

Symbol	Parameter	Rating	Unit
V_{DS}	Drain-Source Voltage [a]	650	V
V_{GS}	Gate-Source Voltage	± 30	V
I_D	Drain Current-Continuous, T_C =25°C	7	A
	Drain Current-Continuous, T_C =100°C	4	A
I_{DM}	Drain Current-Pulsed [b]	28	A
P_D	Maximum Power Dissipation @ T_J =25°C	114	W
E_{AS}	Single Pulsed Avalanche Energy [c]	245	mJ
T_J, T_{STG}	Operating and Store Temperature Range	150，-55 to 150	°C

Thermal Characteristics

Symbol	Parameter	Value	Unit
$R_{\theta JC}$	Thermal Resistance, Junction to Case	1.1	°C/W
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient	63	°C/W

Electrical Characteristics T_J = 25° C unless otherwise noted

■ Off Characteristics

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	V_{GS} = 0V, I_D = 250μA	650	-	-	V
I_{DSS}	Zero Gate Voltage Drain Current	V_{DS} = 650V, V_{GS} = 0V	-	-	1	μA
I_{GSS}	Forward Gate Body Leakage Current	V_{DS} = 0V, V_{GS} = ±30V	-	-	±100	nA

■ On Characteristics

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
V_{GS}(th)	Gate Threshold Voltage	V_{DS} = V_{GS}, I_D =250μA	2.0	-	4.0	V
R_{DS}(on)	Static Drain-Source On-Resistance	V_{GS} = 10V, I_D = 3.5A	-	1.15	1.35	Ω

■ Dynamic Characteristics

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
Ciss	Input Capacitance	V_{DS} = 25V, V_{GS} = 0V, f = 1.0MHz	-	1089	-	pF
Coss	Output Capacitance		-	100	-	pF
Crss	Reverse Transfer Capacitance		-	14	-	pF

■ On Characteristics

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
$t_{d(on)}$	Turn-On Delay Time	V_{DD} = 319V, I_D =7A, V_{GS}=10V, R_{GEN}=24Ω	-	19	-	ns
t_r	Turn-On Rise Time		-	29	-	ns
$t_{d(off)}$	Turn-Off Delay Time		-	78	-	ns
t_f	Turn-Off Fall Time		-	35	-	ns
Qg	Total Gate Charge	V_{DS} = 520V, I_D =7A, V_{GS} = 0 to 10V	-	27		nC
Qgs	Gate-Source Charge		-	6	-	nC
Qgd	Gate-Drain Charge		-	11	-	nC

■ Drain-Source Diode Characteristics

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
I_S	Drain-Source Diode Forward Continuous Current	V_{GS} = 0V	-	-	7	A
I_{SM}	Maximum Pulsed Current	V_{GS} = 0V	-	-	28	A
V_{SD}	Drain-Source Diode Forward Voltage	V_{GS} = 0V, I_S = 7A	-	-	1.2	V
Trr	Body Diode Reverse Recovery Time	I_S=7A,V_{GS} = 0V dI_F/dt=100A/us	-	340	-	ns
Qrr	Body Diode Reverse Recovery Charge		-	2.9	-	uC

Notes:

a. T_J=+25 ℃ to +150 ℃

b. Repetitive rating; pulse width limited by maximum junction temperature.

c. L = 10mH, V_{DD}=50V,I_{AS} = 7A,R_G=25Ω Starting T_J=25 ℃ .

■ Characteristic Curve

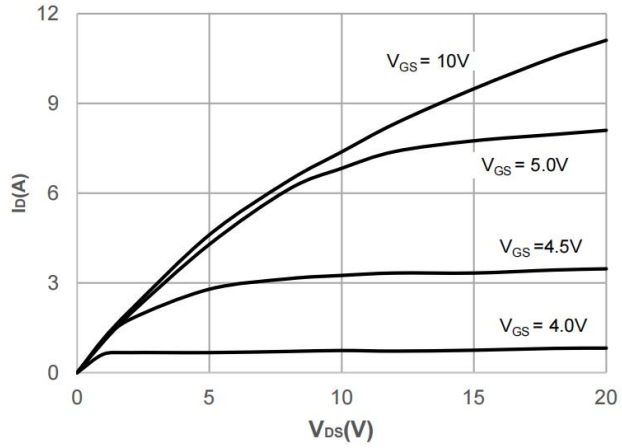

Figure 1. Typical Output Characteristics

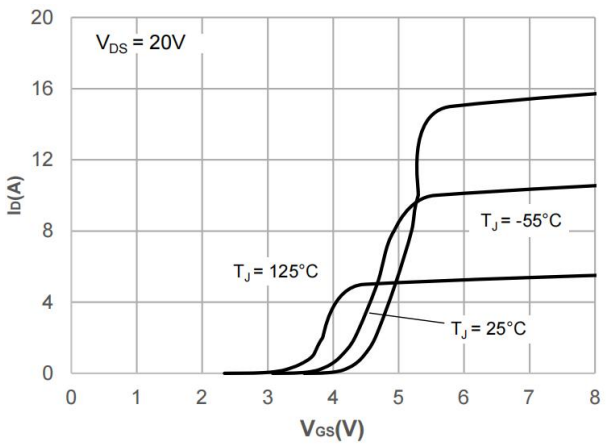

Figure 2. Typical Transfer Characteristics

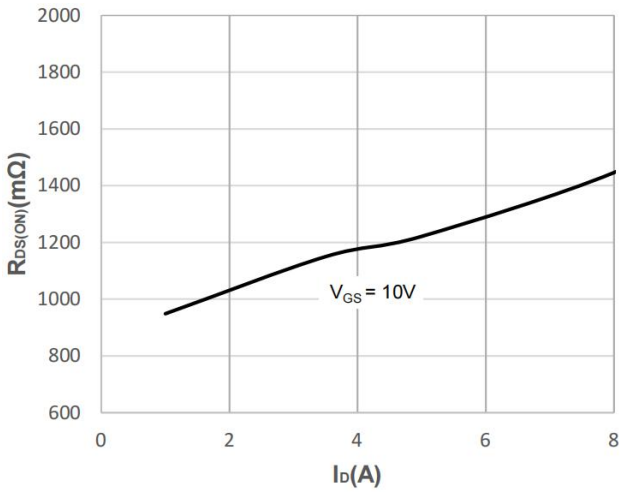

Figure 3. On- Resistance vs. Drain Current

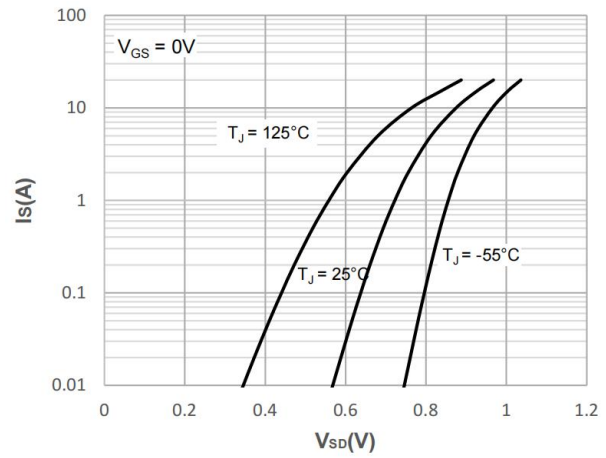

Figure 4.Body-Diode Characteristics

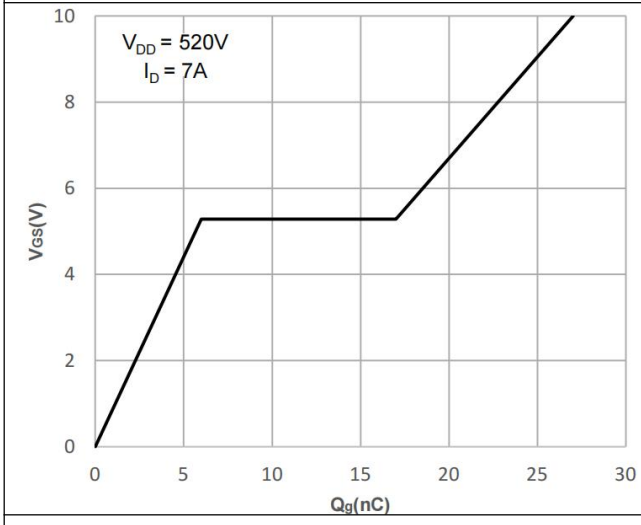

Figure 5. Gate-Charge Characteristics

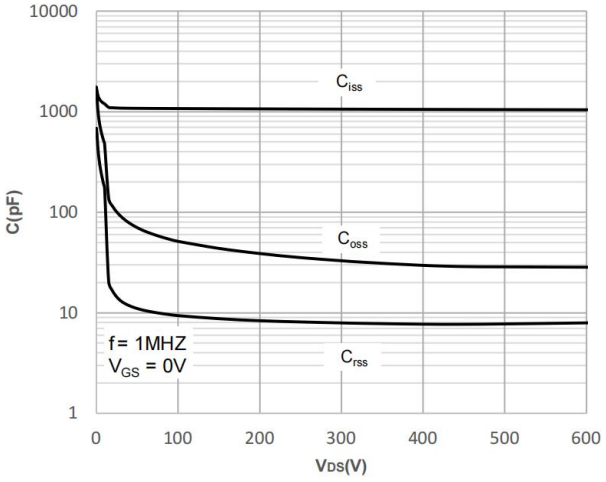

Figure 6.Capacitance Characteristics

■ Characteristic Curve

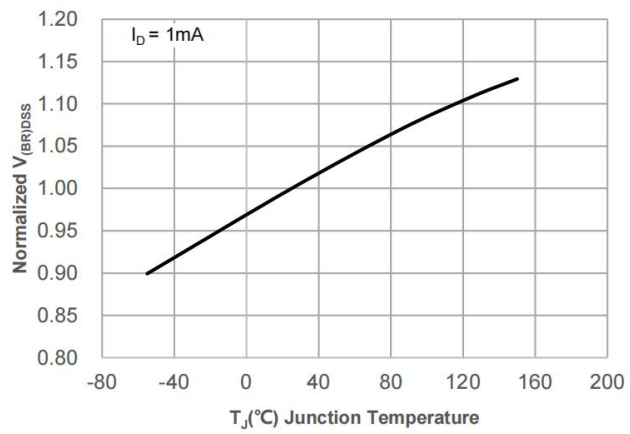

Figure 7.Normalized Breakdown voltage vs. Junction Temperature

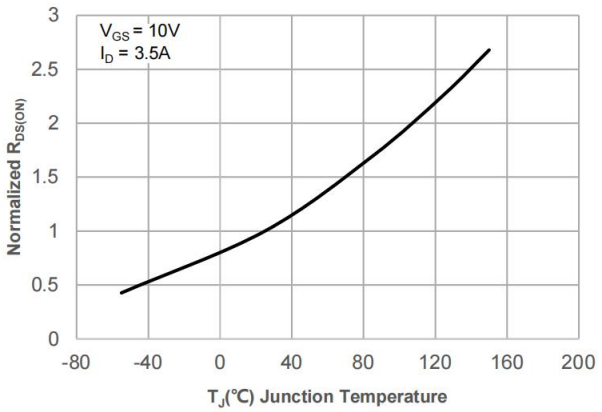

Figure 8. Normalized on Resistance vs. Junction Temperature

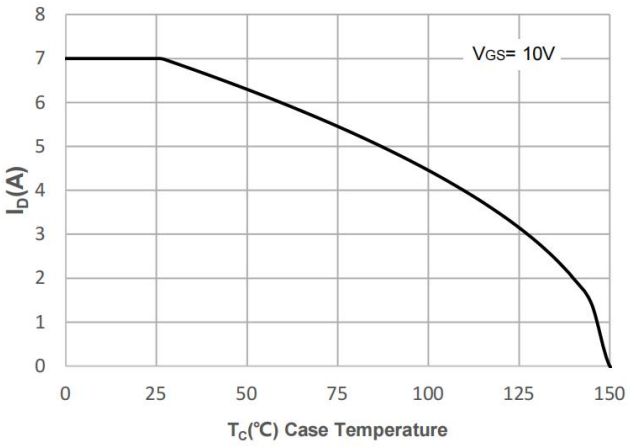

Figure 9: Maximum Continuous Drain Current vs. Case Temperature

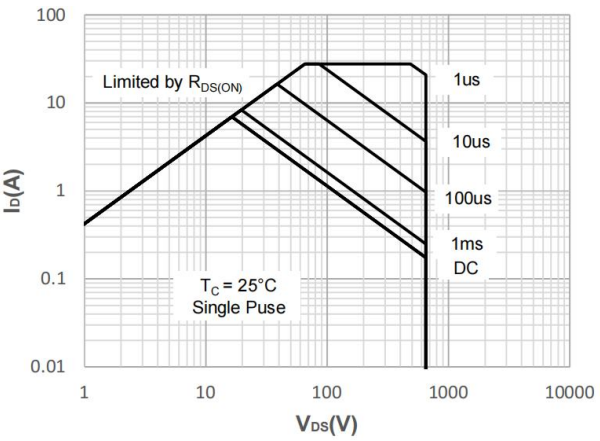

Figure 10:Maximum Safe Operating Area

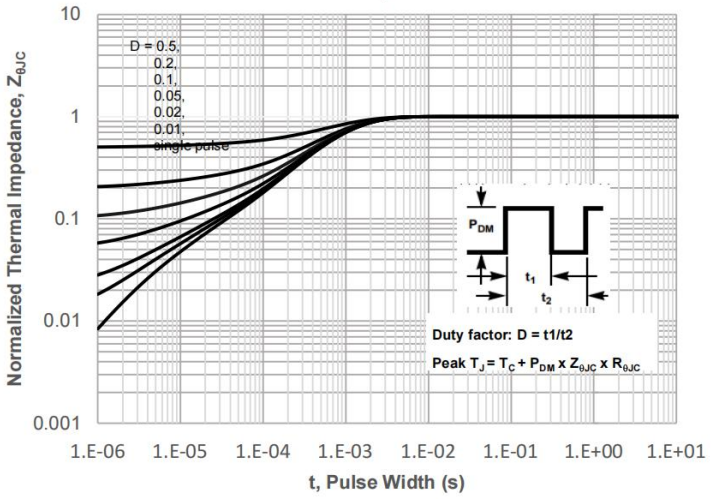

Figure 11. Normalized Maximum Transient Thermal Impedance
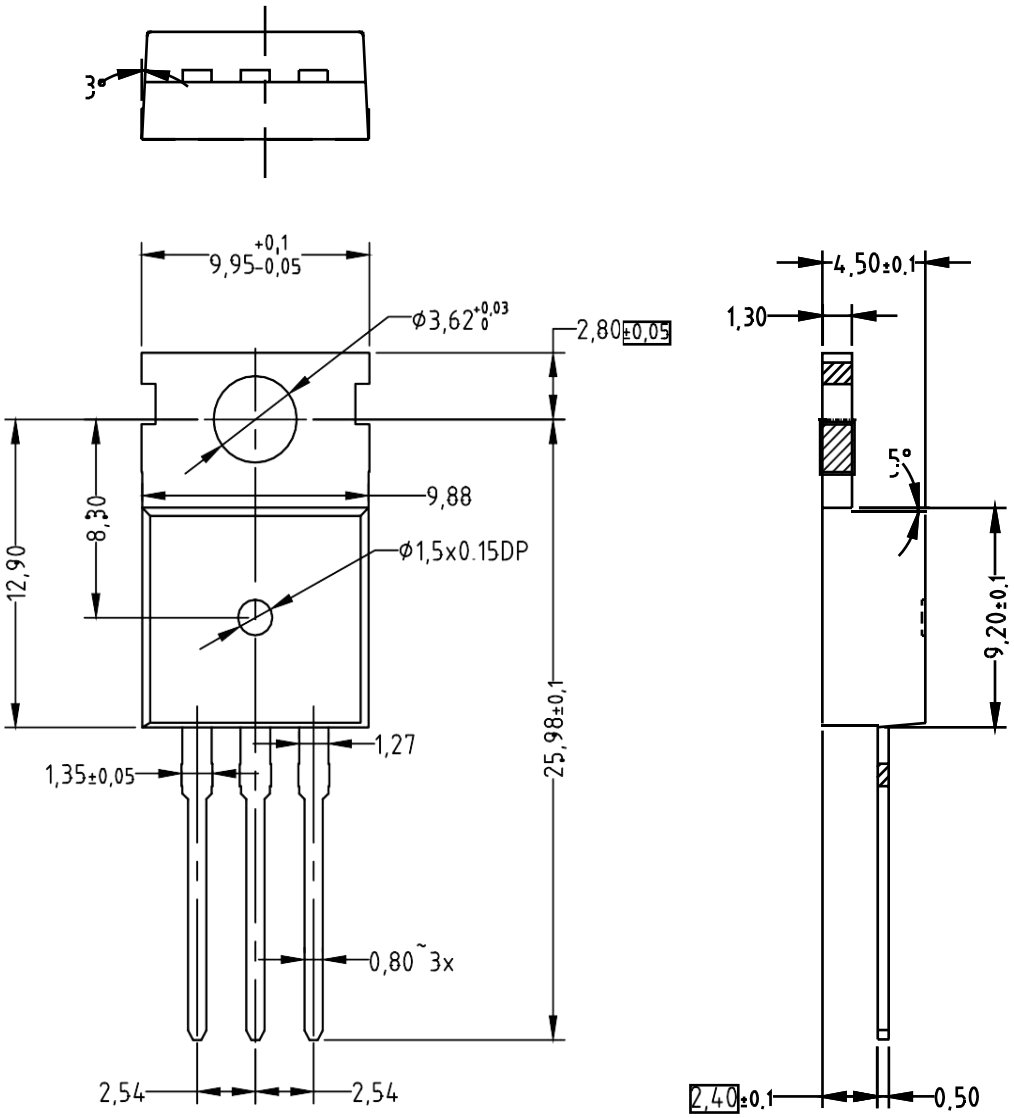
■ Package Information