


Features

- ◆ 650V, 10A, $R_{DS(ON)}$ (Typ.) = 0.80Ω @ $V_{GS} = 10V$.
- ◆ Low C_{rss}
- ◆ Fast Switching
- ◆ 100% Avalanche Tested

Application

- ◆ Adaptor
- ◆ Standby Power
- ◆ Switching power supply
- ◆ LED Power

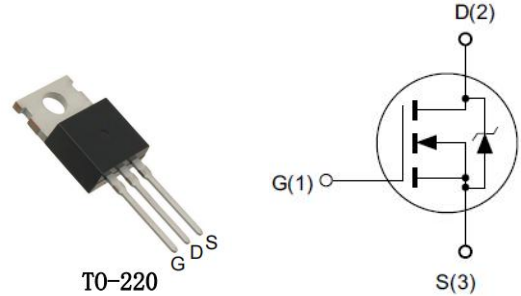

Absolute Maximum Ratings $T_c = 25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Rating	Unit
V_{DS}	Drain-Source Voltage ^a	650	V
V_{GS}	Gate-Source Voltage	± 30	V
I_D	Drain Current-Continuous, $T_c = 25^\circ\text{C}$	10	A
	Drain Current-Continuous, $T_c = 100^\circ\text{C}$	6	A
I_{DM}	Drain Current-Pulsed ^b	40	A
P_D	Maximum Power Dissipation @ $T_J = 25^\circ\text{C}$	125	W
E_{AS}	Single Pulsed Avalanche Energy ^c	405	mJ
T_J, T_{STG}	Operating and Store Temperature Range	150, -55 to 150	$^\circ\text{C}$

Thermal Characteristics

Symbol	Parameter	Value	Unit
$R_{\theta JC}$	Thermal Resistance, Junction to Case	1.0	$^\circ\text{C/W}$
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient	62	$^\circ\text{C/W}$

Electrical Characteristics $T_J = 25^\circ\text{C}$ unless otherwise noted

■ Off Characteristics

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{GS} = 0V, I_D = 250\mu A$	650	-	-	V
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS} = 650V, V_{GS} = 0V$	-	-	1	μA
I_{GSS}	Forward Gate Body Leakage Current	$V_{DS} = 0V, V_{GS} = \pm 30V$	-	-	± 100	nA

■ On Characteristics

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS} = V_{GS}, I_D = 250\mu A$	2.0	-	4.0	V
$R_{DS(on)}$	Static Drain-Source On-Resistance	$V_{GS} = 10V, I_D = 5A$	-	0.80	0.95	Ω

■ Dynamic Characteristics

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
C_{iss}	Input Capacitance	$V_{DS} = 25V,$ $V_{GS} = 0V,$ $f = 1.0MHz$	-	1560	-	pF
C_{oss}	Output Capacitance		-	136	-	pF
C_{rss}	Reverse Transfer Capacitance		-	19	-	pF

■ On Characteristics

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
$t_{d(on)}$	Turn-On Delay Time	$V_{DD} = 325V,$ $I_D = 10A,$ $V_{GS} = 10V,$ $R_{GEN} = 24\Omega$	-	23	-	ns
t_r	Turn-On Rise Time		-	37	-	ns
$t_{d(off)}$	Turn-Off Delay Time		-	104	-	ns
t_f	Turn-Off Fall Time		-	45	-	ns
Q_g	Total Gate Charge	$V_{DS} = 520V,$ $I_D = 10A,$ $V_{GS} = 0 \text{ to } 10V$	-	37	-	nC
Q_{gs}	Gate-Source Charge		-	8	-	nC
Q_{gd}	Gate-Drain Charge		-	15	-	nC

■ Drain-Source Diode Characteristics

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
I_S	Drain-Source Diode Forward Continuous Current	$V_{GS} = 0V$	-	-	10	A
I_{SM}	Maximum Pulsed Current	$V_{GS} = 0V$	-	-	40	A
V_{SD}	Drain-Source Diode Forward Voltage	$V_{GS} = 0V, I_S = 10A$	-	-	1.2	V
T_{rr}	Body Diode Reverse Recovery Time	$I_S = 10A, V_{GS} = 0V$ $di_F/dt = 100A/\mu s$	-	423	-	ns
Q_{rr}	Body Diode Reverse Recovery Charge		-	4.4	-	μC

Notes:

- $T_J = +25^\circ C$ to $+150^\circ C$
- Repetitive rating; pulse width limited by maximum junction temperature.
- $L = 10mH, V_{DD} = 50V, I_{AS} = 9A, R_G = 25\Omega$ Starting $T_J = 25^\circ C$.

Characteristic Curve

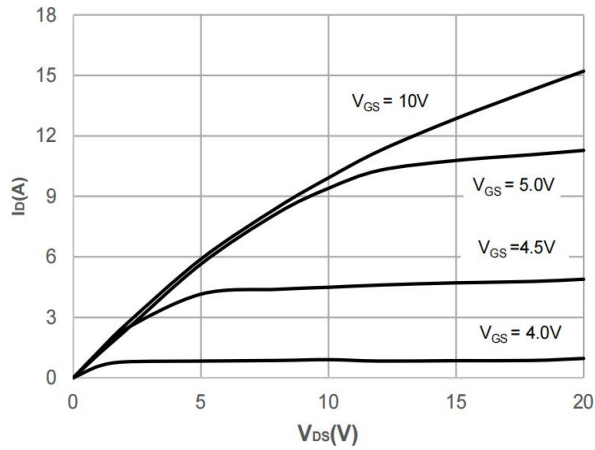


Figure 1. Typical Output Characteristics

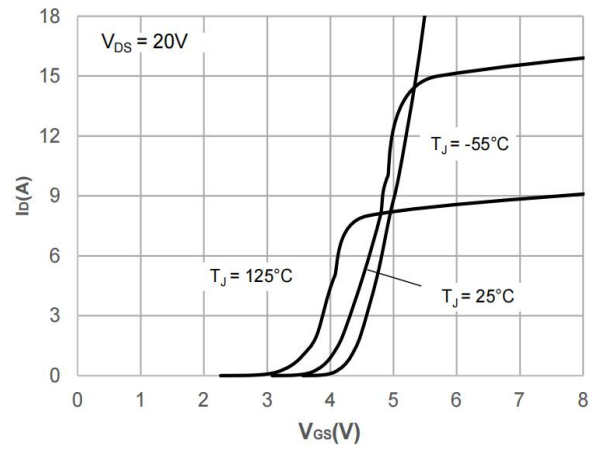


Figure 2. Typical Transfer Characteristics

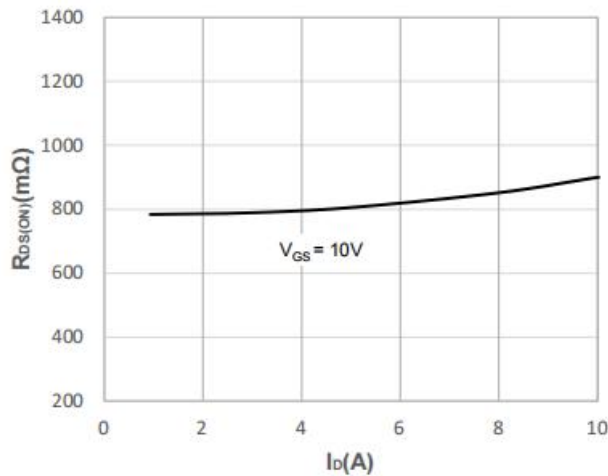


Figure 3. On-Resistance vs. Drain Current

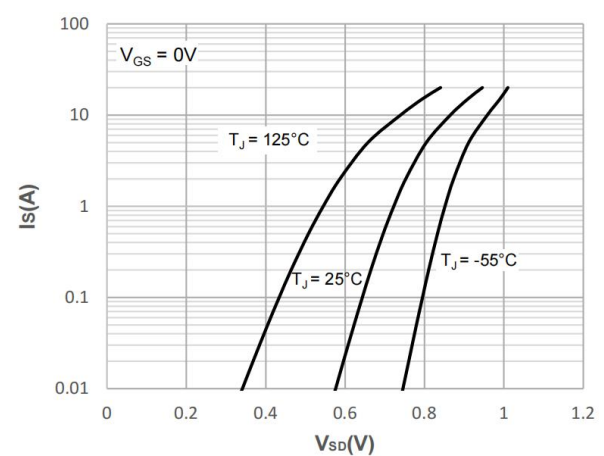


Figure 4. Body-Diode Characteristics

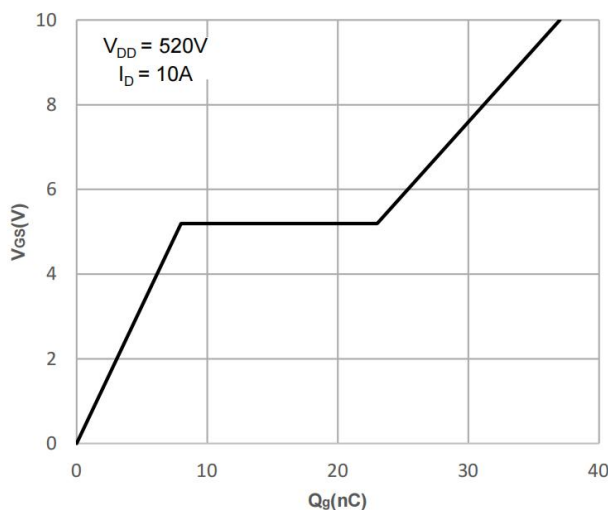


Figure 5. Gate-Charge Characteristics

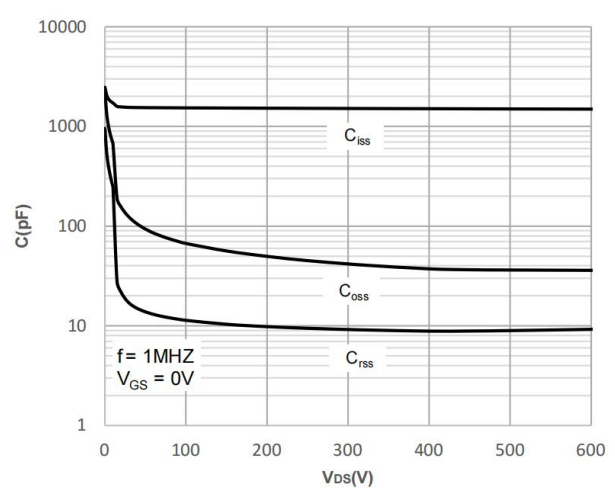


Figure 6. Capacitance Characteristics

■ Characteristic Curve

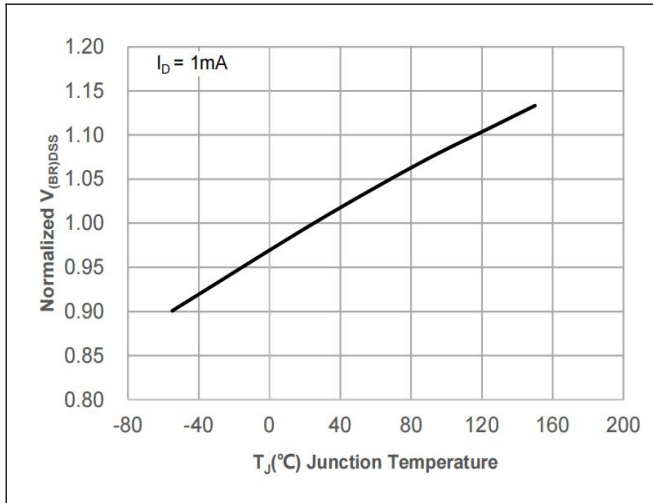


Figure 7. Normalized Breakdown voltage vs. Junction Temperature

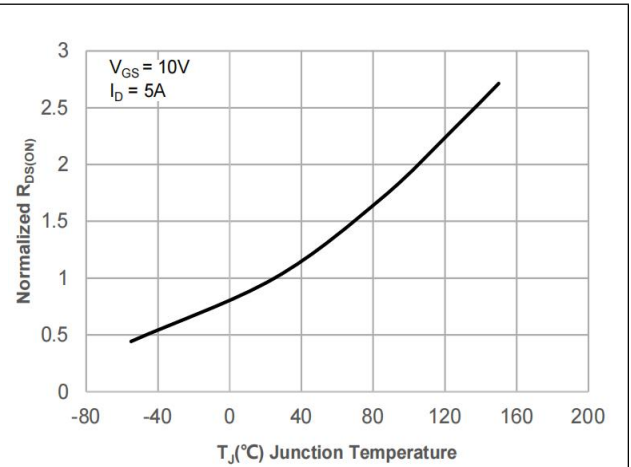


Figure 8. Normalized on Resistance vs. Junction Temperature

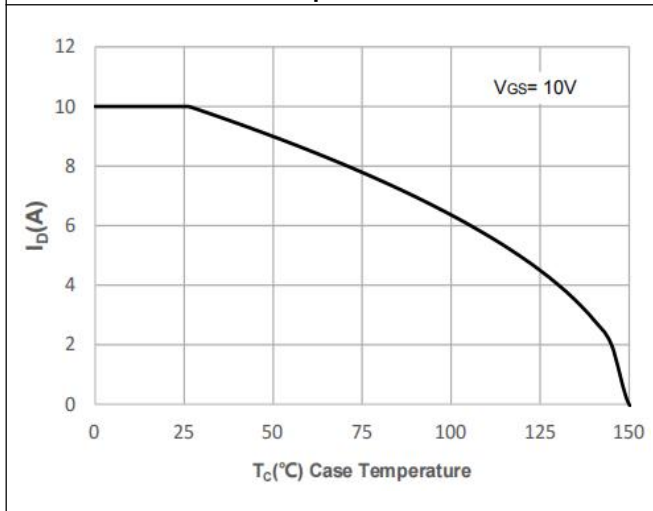


Figure 9: Maximum Continuous Drain Current vs. Case Temperature

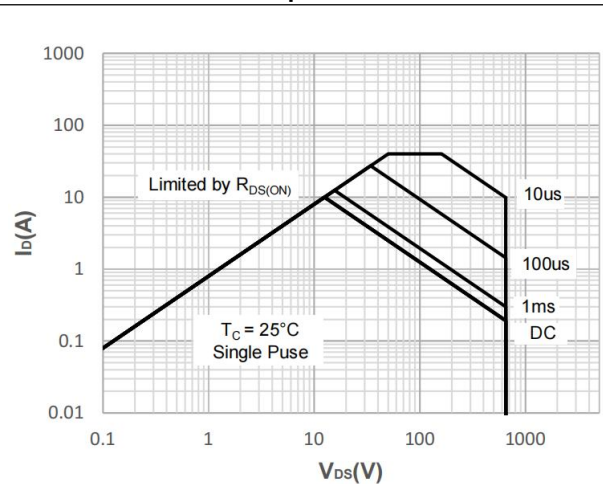


Figure 10: Maximum Safe Operating Area

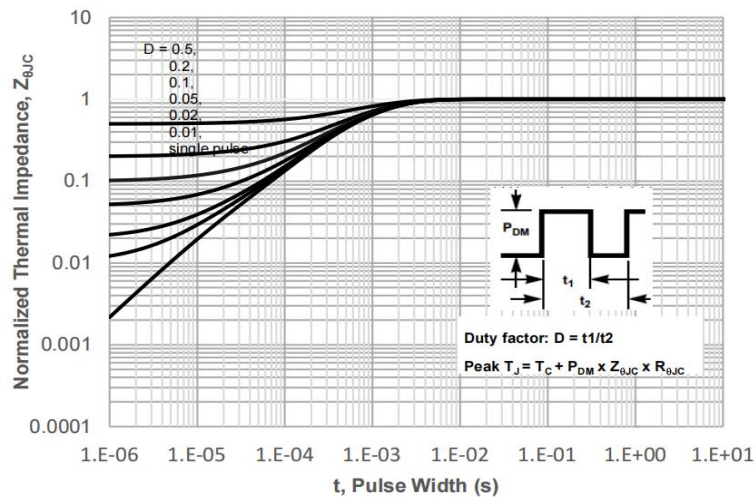


Figure 11. Normalized Maximum Transient Thermal Impedance



Technical drawing of a mechanical part, showing three views: Top View, Front View, and Side View. Dimensions are in millimeters (mm).

Top View:

- Overall width: $9.95^{+0.1}_{-0.05}$
- Overall height: 12.90
- Distance from top edge to center of circular feature: 8.30
- Distance from center of circular feature to center of hole: 9.88
- Distance from center of hole to center of slot: 1.35 ± 0.05
- Distance from center of slot to center of slot: 2.54
- Distance from center of slot to center of slot: 2.54
- Distance from center of slot to center of slot: $0.80 \sim 3x$
- Distance from center of slot to center of slot: 1.27

Front View:

- Overall width: $9.95^{+0.1}_{-0.05}$
- Overall height: 25.98 ± 0.1
- Distance from top edge to center of circular feature: 8.30
- Distance from center of circular feature to center of hole: 9.88
- Distance from center of hole to center of slot: 1.35 ± 0.05
- Distance from center of slot to center of slot: 2.54
- Distance from center of slot to center of slot: 2.54
- Distance from center of slot to center of slot: $0.80 \sim 3x$
- Distance from center of slot to center of slot: 1.27

Side View:

- Overall width: 4.50 ± 0.1
- Overall height: 9.20 ± 0.1
- Distance from top edge to center of circular feature: 1.30
- Distance from center of circular feature to center of hole: 5°
- Distance from center of hole to center of slot: 2.40 ± 0.1
- Distance from center of slot to center of slot: 0.50