



MPF18N20


N-Channel Power MOSFET

Features

- ◆ 200V, 18A, $R_{DS(ON)}$ (Typ.) = 0.16Ω @ $V_{GS} = 10V$.
- ◆ Low C_{rss}
- ◆ Fast Switching
- ◆ 100% Avalanche Tested

Application

- ◆ High efficiency switch mode power supplies
- ◆ Electronic lamp ballasts based on half bridge
- ◆ UPS

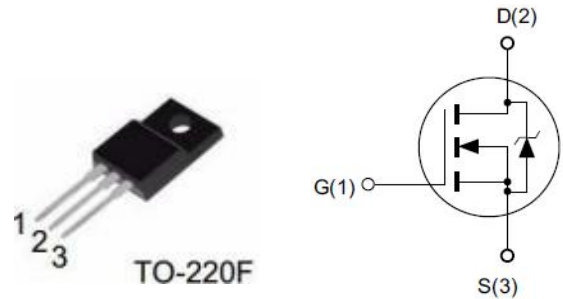

Absolute Maximum Ratings $T_c = 25^\circ C$ unless otherwise noted

Symbol	Parameter	Rating	Unit
V_{DS}	Drain-Source Voltage ^a	200	V
V_{GS}	Gate-Source Voltage	± 30	V
I_D	Drain Current-Continuous, $T_C = 25^\circ C$	18	A
	Drain Current-Continuous, $T_C = 100^\circ C$	11.4	A
I_{DM}	Drain Current-Pulsed ^b	72	A
P_D	Maximum Power Dissipation @ $T_J = 25^\circ C$	44	W
dv/dt	Peak Diode Recovery dv/dt ^c	5.5	V/ns
E_{AS}	Single Pulsed Avalanche Energy ^d	405	mJ
T_J, T_{STG}	Operating and Store Temperature Range	150, -55 to 150	$^\circ C$

Thermal Characteristics

Symbol	Parameter	Value	Unit
$R_{\theta JC}$	Thermal Resistance, Junction to Case	2.85	$^\circ C/W$
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient	62.5	$^\circ C/W$

Electrical Characteristics $T_J = 25^\circ C$ unless otherwise noted

■ Off Characteristics

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{GS} = 0V, I_D = 250\mu A$	200	-	-	V
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS} = 200V, V_{GS} = 0V$	-	-	1	μA
I_{GSS}	Forward Gate Body Leakage Current	$V_{DS} = 0V, V_{GS} = \pm 30V$	-	-	± 100	nA
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS} = V_{GS}, I_D = 250\mu A$	2	-	4	V



MPF18N20

N-Channel Power MOSFET

■ On Characteristics

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS} = V_{GS}, I_D = 250\mu A$	2.0	-	4.0	V
$R_{DS(on)}$	Static Drain-Source On-Resistance	$V_{GS} = 10V, I_D = 9A$	-	0.16	0.19	Ω

■ Dynamic Characteristics

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
C_{iss}	Input Capacitance	$V_{DS} = 25V,$ $V_{GS} = 0V,$ $f = 1.0MHz$	-	1330	-	pF
C_{oss}	Output Capacitance		-	181	-	pF
C_{rss}	Reverse Transfer Capacitance		-	48	-	pF

■ On Characteristics

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
$t_{d(on)}$	Turn-On Delay Time	$V_{DD} = 100V, I_D = 18A,$ $V_{GS} = 10V$	-	54	-	ns
t_r	Turn-On Rise Time		-	104	-	ns
$t_{d(off)}$	Turn-Off Delay Time		-	327	-	ns
t_f	Turn-Off Fall Time		-	107	-	ns
Q_g	Total Gate Charge	$V_{DS} = 160V, I_D = 18A,$ $V_{GS} = 10V$	-	47	-	nC
Q_{gs}	Gate-Source Charge		-	8	-	nC
Q_{gd}	Gate-Drain Charge		-	22	-	nC

■ Drain-Source Diode Characteristics

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
I_S	Drain-Source Diode Forward Continuous Current	$V_{GS} = 0V$	-	-	18	A
I_{SM}	Maximum Pulsed Current	$V_{GS} = 0V$	-	-	72	A
V_{SD}	Drain-Source Diode Forward Voltage	$V_{GS} = 0V, I_S = 11A$	-	-	1.5	V
T_{rr}	Body Diode Reverse Recovery Time	$I_S = 11A, V_{GS} = 0V$ $dI_F/dt = 100A/\mu s$	-	195	-	ns
Q_{rr}	Body Diode Reverse Recovery Charge	$I_S = 11A, V_{GS} = 0V$ $dI_F/dt = 100A/\mu s$	-	1480	-	nC

Notes:

- $T_J = +25^\circ C$ to $+150^\circ C$
- Repetitive rating; pulse width limited by maximum junction temperature.
- $I_{SD} = 18A, dI_F/dt \leq 100A/\mu s, V_{DD} \leq BV_{DS}$, Start $T_J = 25^\circ C$.
- $L = 10mH, V_{DD} = 50V, I_{AS} = 9.0A, R_G = 25\Omega$ Starting $T_J = 25^\circ C$.

■ Characteristic Curve

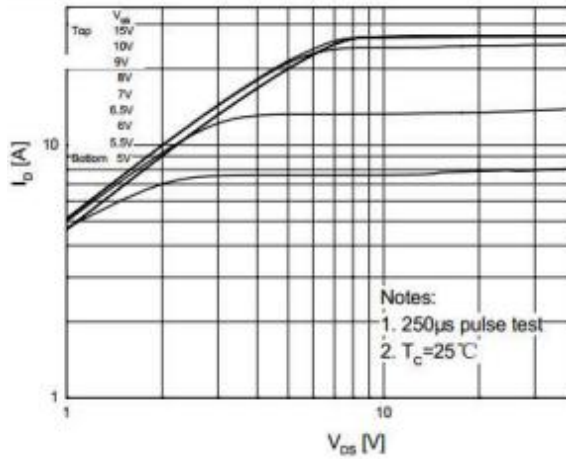


Figure 1. Typical Output Characteristics

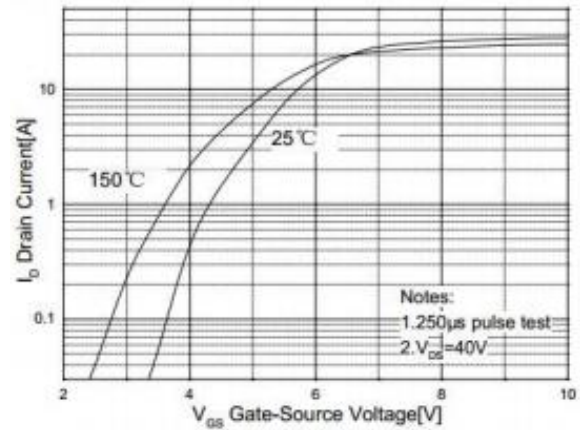


Figure 2. Typical Transfer Characteristics

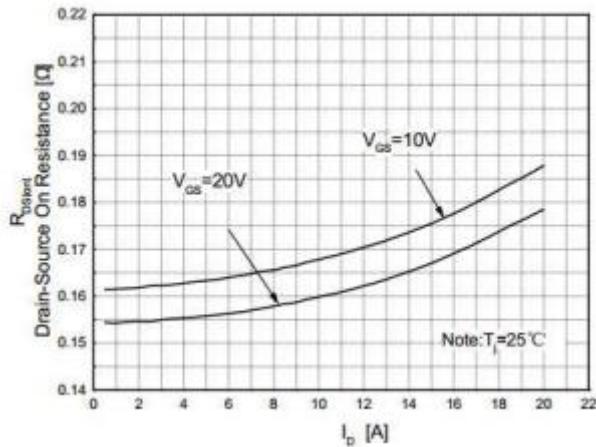


Figure 3. On-Resistance vs. Drain Current

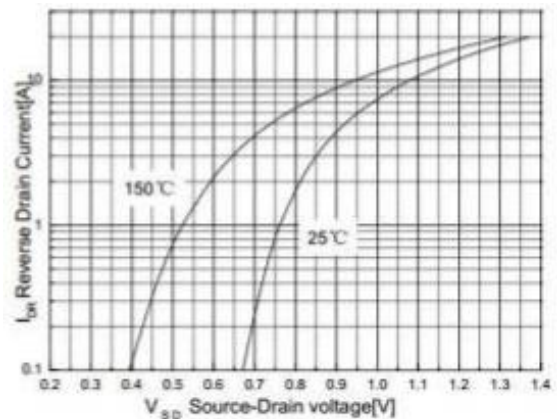


Figure 4. Body-Diode Characteristics

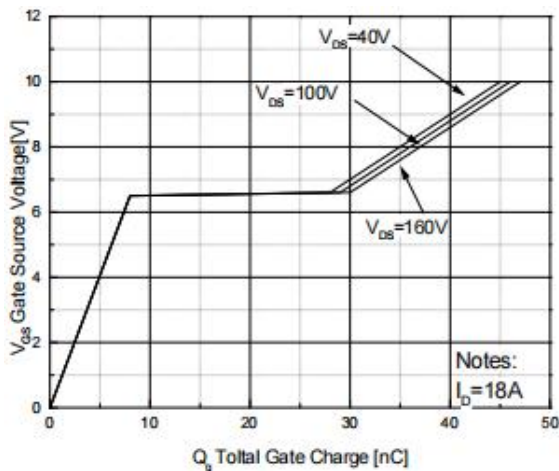


Figure 5. Gate-Charge Characteristics

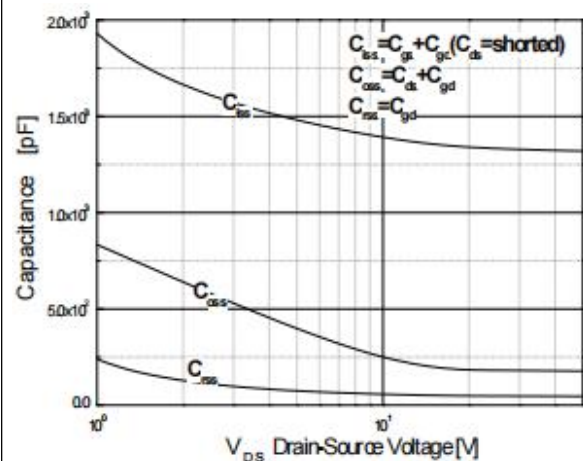


Figure 6. Capacitance Characteristics

■ Characteristic Curve

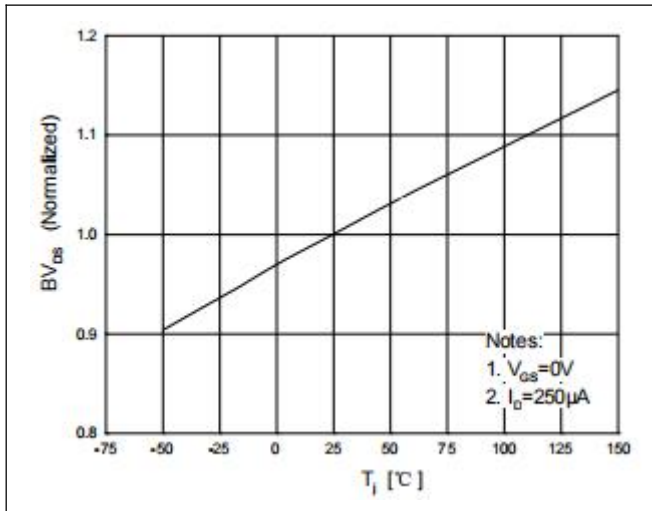


Figure 7. Normalized Breakdown voltage vs. Junction Temperature

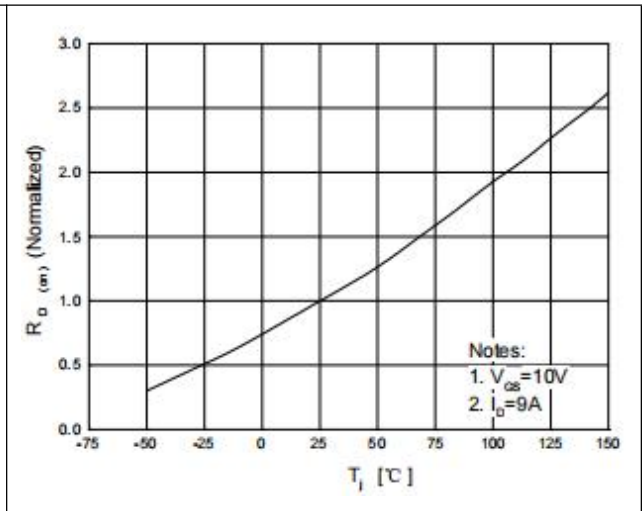


Figure 8. Normalized on Resistance vs. Junction Temperature

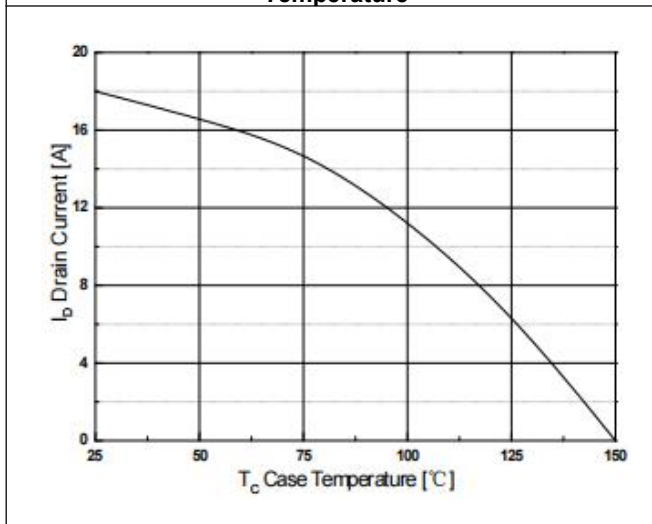


Figure 9: Maximum Continuous Drain Current vs. Case Temperature

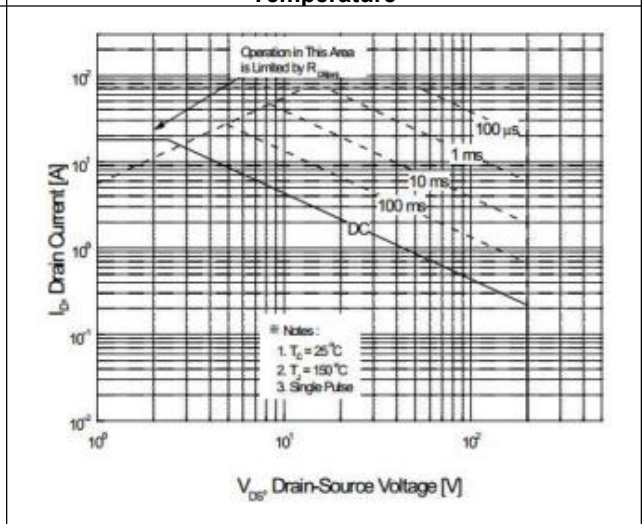


Figure 10: Maximum Safe Operating Area

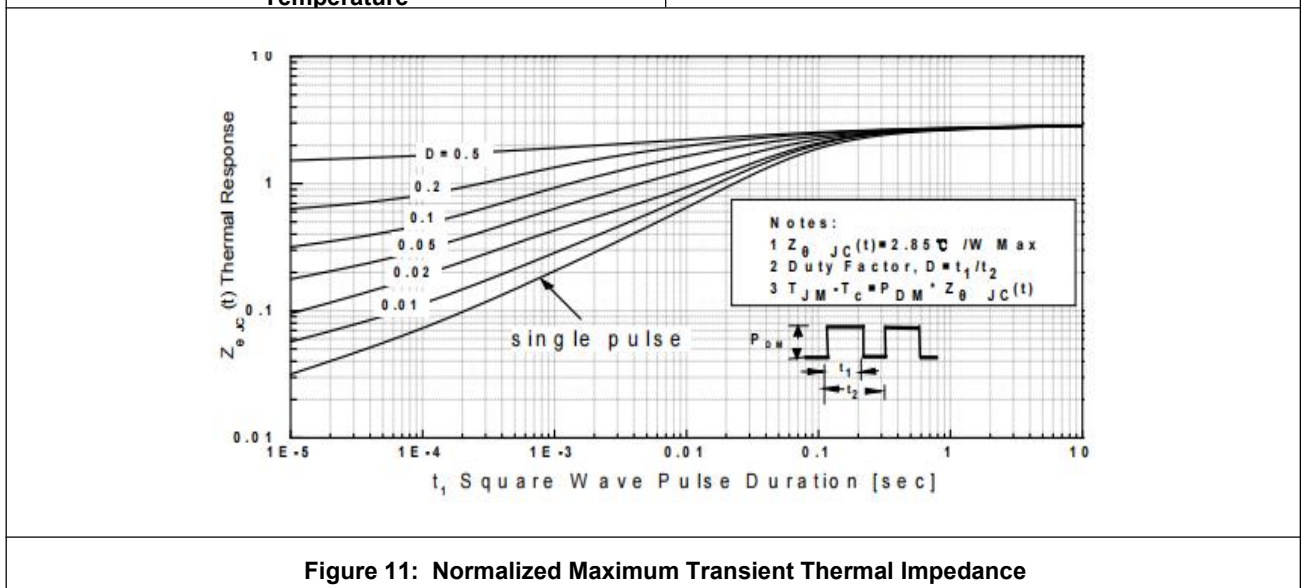


Figure 11: Normalized Maximum Transient Thermal Impedance



Technical drawing of a mechanical part, showing three views: top, front, and side.

Top View:

- Overall width: 10.16 ± 0.2
- Overall height: 15.87 ± 0.2
- Central circular hole diameter: $\phi 3.18$
- Four smaller holes (two on each side of the center): $\phi 1.5 \times 0.1 \pm 0.05 \text{ DP}$
- Distance from center to side holes: 2.54
- Distance from center to bottom holes: 2.54

Front View:

- Overall width: 10.16 ± 0.2
- Overall height: 15.87 ± 0.2
- Central circular hole diameter: $\phi 3.18$
- Four smaller holes (two on each side of the center): $\phi 1.5 \times 0.1 \pm 0.05 \text{ DP}$
- Distance from center to side holes: 2.54
- Distance from center to bottom holes: 2.54

Side View:

- Overall width: 10.16 ± 0.2
- Overall height: 15.87 ± 0.2
- Central circular hole diameter: $\phi 3.18$
- Four smaller holes (two on each side of the center): $\phi 1.5 \times 0.1 \pm 0.05 \text{ DP}$
- Distance from center to side holes: 2.54
- Distance from center to bottom holes: 2.54