



Features

- ◆ 650V, 20A, $R_{DS(ON)}(Typ.) = 0.40\Omega @ V_{GS} = 10V$.
- ◆ Low C_{rss}
- ◆ Fast Switching
- ◆ 100% Avalanche Tested

Application

- ◆ Adaptor
- ◆ Standby Power
- ◆ Switching power supply



Absolute Maximum Ratings $T_c = 25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Limit	Unit
		TO-220F	
V_{DS}	Drain-Source Voltage ^a	650	V
V_{GS}	Gate-Source Voltage	± 30	V
I_D	Drain Current-Continuous, $T_c = 25^\circ\text{C}$	20	A
	Drain Current-Continuous, $T_c = 100^\circ\text{C}$	12.5	A
I_{DM}	Drain Current-Pulsed ^b	80	A
P_D	Maximum Power Dissipation @ $T_J = 25^\circ\text{C}$	85	W
EAS	Single Pulsed Avalanche Energy ^d	980	mJ
T_J, T_{STG}	Operating and Store Temperature Range	-55 to 150	$^\circ\text{C}$

Thermal Characteristics

Symbol	Parameter	Value	Unit
$R_{\theta JC}$	Thermal Resistance, Junction-Case Max.	1.47	$^\circ\text{C/W}$
$R_{\theta JA}$	Thermal Resistance Junction-Ambient Max.	62.5	$^\circ\text{C/W}$

Electrical Characteristics $T_J = 25^\circ\text{C}$ unless otherwise noted

Off Characteristics

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{GS} = 0V, I_D = 250\mu\text{A}$	650	-	-	V
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS} = 650V, V_{GS} = 0V$	-	-	1	μA
I_{GSS}	Forward Gate Body Leakage Current	$V_{DS} = 0V, V_{GS} = \pm 30V$	-	-	± 100	nA



MPF20N65

N-Channel Power MOSFET

On Characteristics

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS} = V_{GS}, I_D = 250\mu A$	2	-	4	V
$R_{DS(on)}$	Static Drain-Source On-Resistance ^c	$V_{GS} = 10V, I_D = 10A$	-	0.40	0.50	Ω

Dynamic Characteristics

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
C_{iss}	Input Capacitance	$V_{DS} = 25V,$ $V_{GS} = 0V,$ $f = 1.0MHz$	-	3059	-	pF
C_{oss}	Output Capacitance		-	291	-	pF
C_{rss}	Reverse Transfer Capacitance		-	16	-	pF

On Characteristics

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
$t_{d(on)}$	Turn-On Delay Time	$V_{DD} = 325V, I_D = 20A,$ $V_{GS} = 10V$	-	37	-	ns
t_r	Turn-On Rise Time		-	70	-	ns
$t_{d(off)}$	Turn-Off Delay Time		-	89	-	ns
t_f	Turn-Off Fall Time		-	49	-	ns
Q_g	Total Gate Charge	$V_{DS} = 325V, I_D = 20A,$ $V_{GS} = 10V$	-	54.5	-	nC
Q_{gs}	Gate-Source Charge		-	13.3	-	nC
Q_{gd}	Gate-Drain Charge		-	18.7	-	nC

Drain-Source Diode Characteristics

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
I_S	Drain-Source Diode Forward Continuous Current	$V_{GS} = 0V$	-	-	20	A
I_{SM}	Maximum Pulsed Current	$V_{GS} = 0V$	-	-	80	A
V_{SD}	Drain-Source Diode Forward Voltage	$V_{GS} = 0V, I_S = 20A$	-	-	1.4	V
T_{rr}	Body Diode Reverse Recovery Time	$di/dt = 100A/\mu s$ $I_S = 20A, V_{GS} = 0V$	-	561	-	ns
Q_{rr}	Reverse Recovery Charge		-	6.9	-	μC

Notes:

- $T_J = +25^\circ C$ to $+150^\circ C$.
- Repetitive rating; pulse width limited by maximum junction temperature.
- Pulse width $\leq 300\mu s$; duty cycle $\leq 2\%$.
- $L = 10mH, V_{DD} = 50V, I_{AS} = 14A, R_G = 25\Omega$ Starting $T_J = 25^\circ C$.

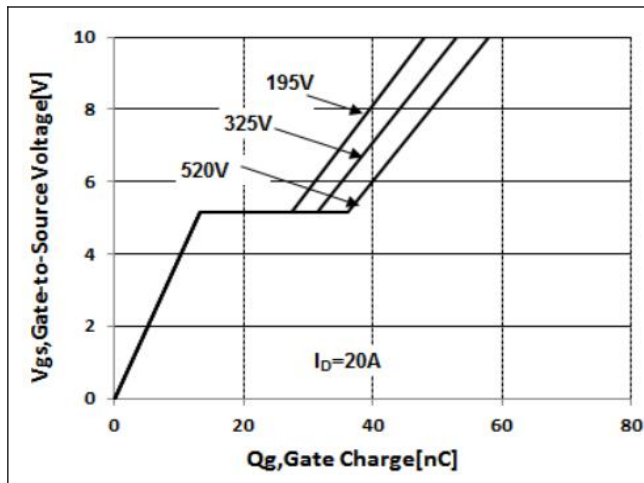


Figure 1. Gate Charge Characteristics

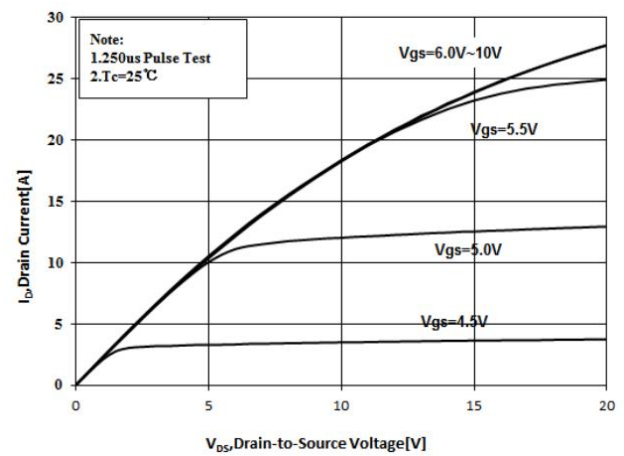


Figure 2. On-State Characteristics

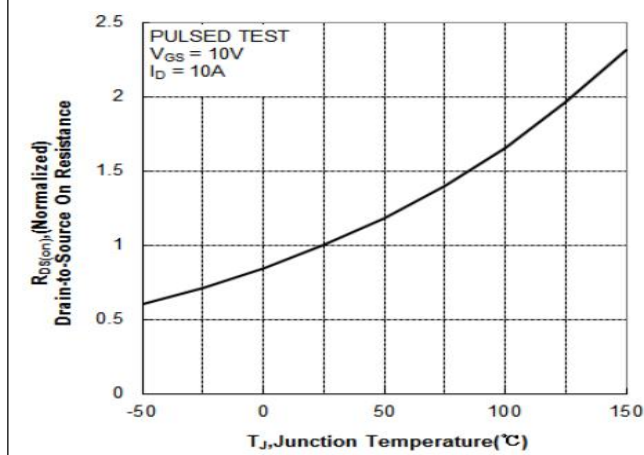


Figure 3. Normalized On-Resistance Variation with Temperature

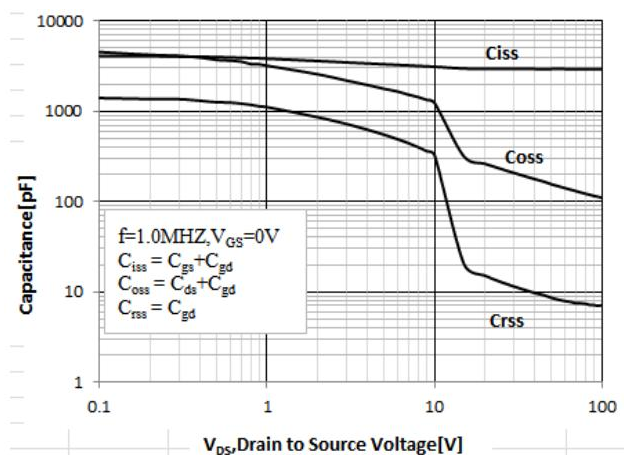


Figure 4. Typical Capacitance vs Drain to Source Voltage

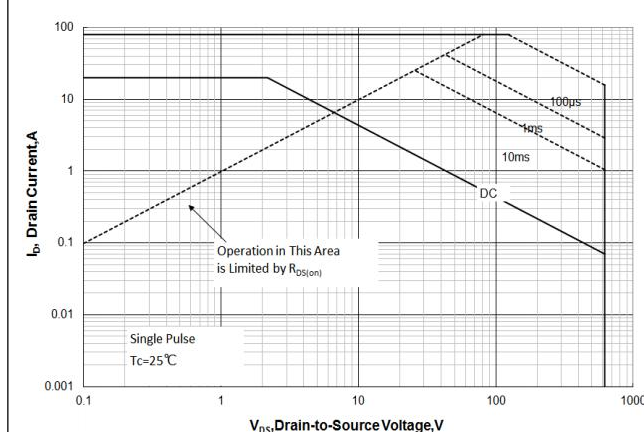


Figure 5 Maximum Forward Bias Safe Operating Area
TO-220F

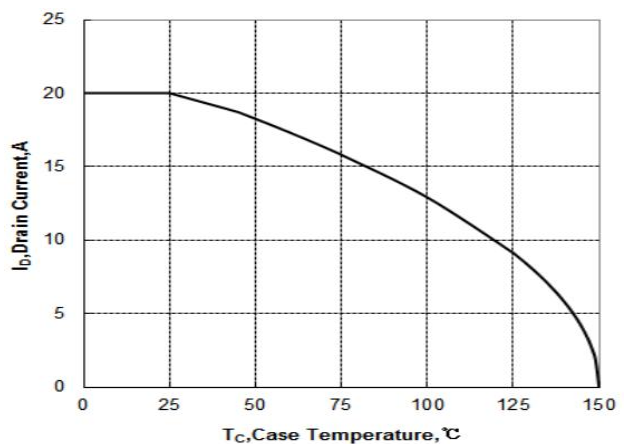


Figure 6. Maximum Continuous Drain Current vs Case Temperature

■ Package Information

