


Features

- ◆ 800V, 15A, $R_{DS(ON)}(Typ.) = 0.25\Omega @ V_{GS} = 10V$
- ◆ Advanced Super Junction Technology
- ◆ Easy to Control Gate Switching
- ◆ 100% Avalanche Tested

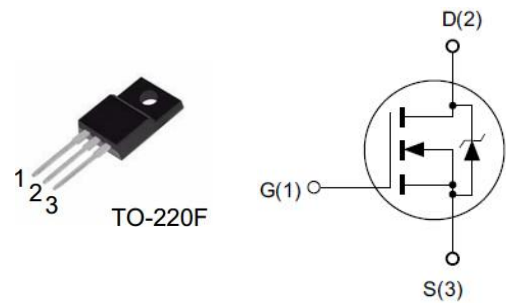

Application

- ◆ Single-ended flyback or two-transistor forward topologies
- ◆ PC power, PD Adaptor, LCD & PDP TV and LED lighting

Absolute Maximum Ratings $T_C = 25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Rating	Unit
V_{DS}	Drain-Source Voltage ^a	800	V
V_{GS}	Gate-Source Voltage	± 30	
I_D	Drain Current-Continuous, $T_C = 25^\circ\text{C}$	15	A
I_{DM}	Drain Current-Pulsed ^b	45	
P_D	Maximum Power Dissipation @ $T_J = 25^\circ\text{C}$	34.7	W
dv/dt	Peak Diode Recovery dv/dt	15	V/ns
E_{AS}	Single Pulsed Avalanche Energy ^c	320	mJ
T_J, T_{STG}	Operating and Store Temperature Range	150, -55 to 150	$^\circ\text{C}$

Thermal Characteristics

Symbol	Parameter	Value	Unit
$R_{\theta JC}$	Thermal Resistance, Junction to Case	3.6	$^\circ\text{C/W}$
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient	62	

Electrical Characteristics $T_J = 25^\circ\text{C}$ unless otherwise noted

■ Off Characteristics

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{GS} = 0V, I_D = 250\mu A$	805	-	-	V
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS} = 800V, V_{GS} = 0V$	-	-	1	μA
I_{GSS}	Forward Gate Body Leakage Current	$V_{DS} = 0V, V_{GS} = 30V$	-	-	100	nA



MJF15N80

N-Channel Power MOSFET

■ On Characteristics

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS} = V_{GS}, I_D = 250\mu A$	2.5	-	4.2	V
$R_{DS(on)}$	Static Drain-Source On-Resistance ^d	$V_{GS} = 10V, I_D = 7.5A$	-	0.25	0.29	Ω

■ Dynamic Characteristics

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
R_g	Gate Resistance	$f = 1.0MHz$	-	25	-	Ω
C_{iss}	Input Capacitance	$V_{DS} = 100V,$ $V_{GS} = 0V,$ $f = 100kHz$	-	1728	-	pF
C_{oss}	Output Capacitance		-	46	-	
C_{rss}	Reverse Transfer Capacitance		-	0.78	-	

■ On Characteristics

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
$t_{d(on)}$	Turn-On Delay Time	$V_{DD} = 400V,$ $V_{GS} = 10V,$ $I_D = 17A,$ $R_G = 5\Omega$	-	29	-	ns
t_r	Turn-On Rise Time		-	42	-	
$t_{d(off)}$	Turn-Off Delay Time		-	137	-	
t_f	Turn-Off Fall Time		-	36	-	
Q_g	Total Gate Charge	$V_{DD} = 600V,$ $V_{GS} = 0 \text{ to } 10V,$ $I_D = 17A$	-	38.8	-	nC
Q_{gs}	Gate-Source Charge		-	8.6	-	
Q_{gd}	Gate-Drain Charge		-	13.4	-	

■ Drain-Source Diode Characteristics

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
V_{SD}	Drain-Source Diode Forward Voltage	$V_{GS} = 0V, I_F = 1A$	-	0.7	-	V
T_{rr}	Body Diode Reverse Recovery Time	$V_R = 400V, I_F = 17A$ $di_F/dt = 100A/\mu s$	-	427	-	ns
Q_{rr}	Body Diode Reverse Recovery Charge	$V_R = 400V, I_F = 17A$ $di_F/dt = 100A/\mu s$	-	6.8	-	μC
I_{rrm}	Peak reverse recovery current	$V_R = 400V, I_F = 17A$ $di_F/dt = 100A/\mu s$	-	29	-	A

Notes:

- $T_J = +25^\circ C$ to $+150^\circ C$.
- Repetitive rating; pulse width limited by maximum junction temperature.
- $L = 10mH, V_{DD} = 100V, I_{AS} = 8A, R_G = 25\Omega$ Starting $T_J = 25^\circ C$.
- Pulse width $\leq 300\mu s$; duty cycle $\leq 2\%$

■ Characteristic Curve

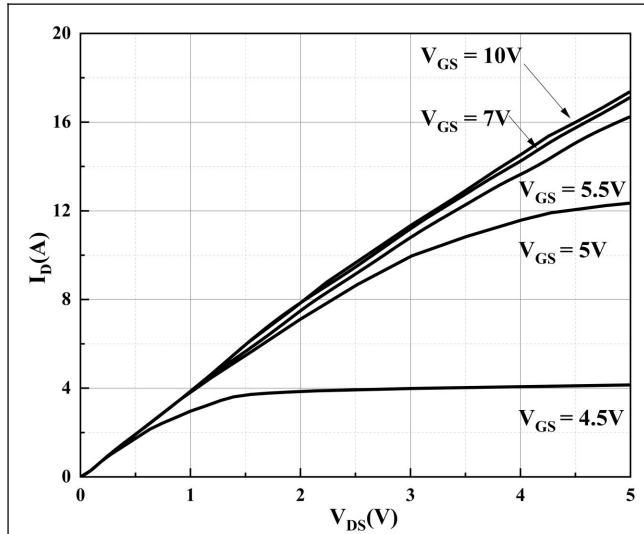


Figure 1. Typical Output Characteristics

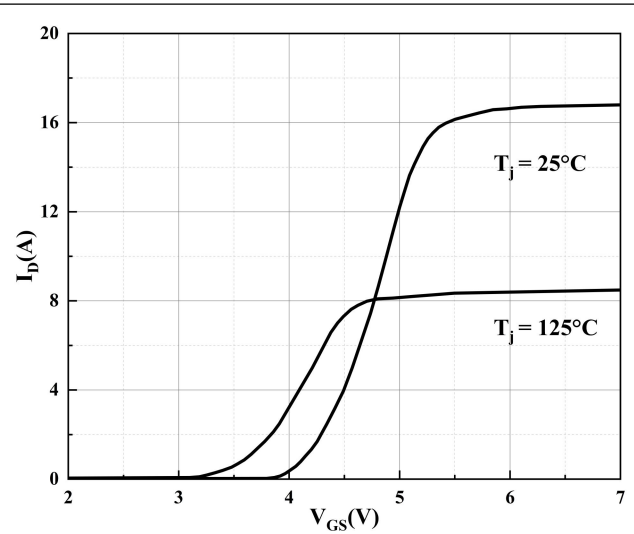


Figure 2. Typical Transfer Characteristics

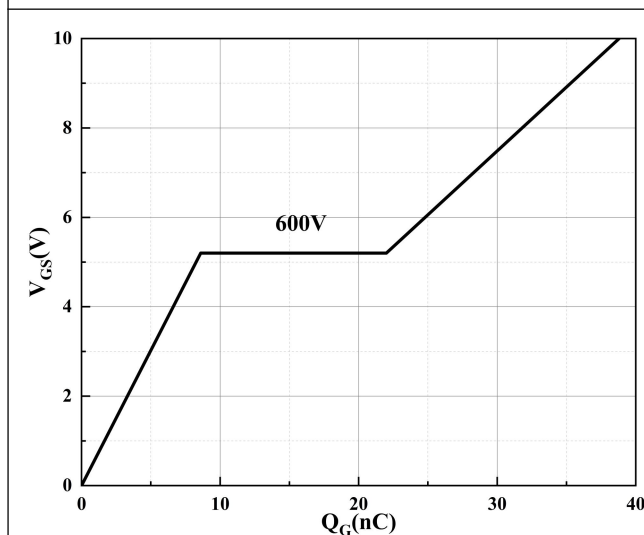


Figure 3. Typical Gate-Charge Characteristics

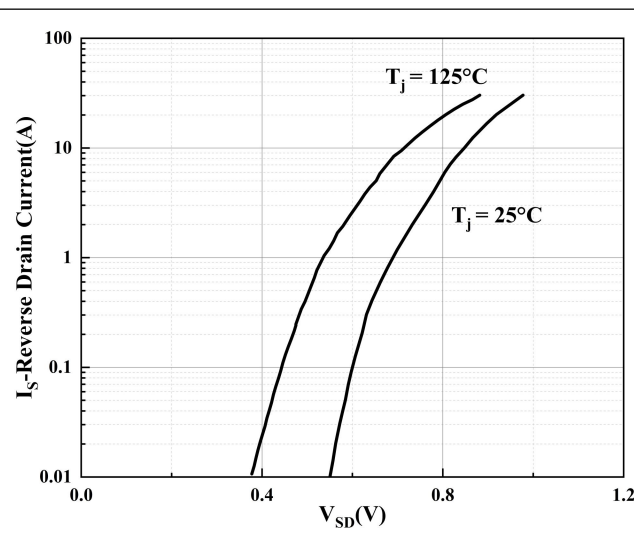


Figure 4. Forward Characteristics of Reverse Diode

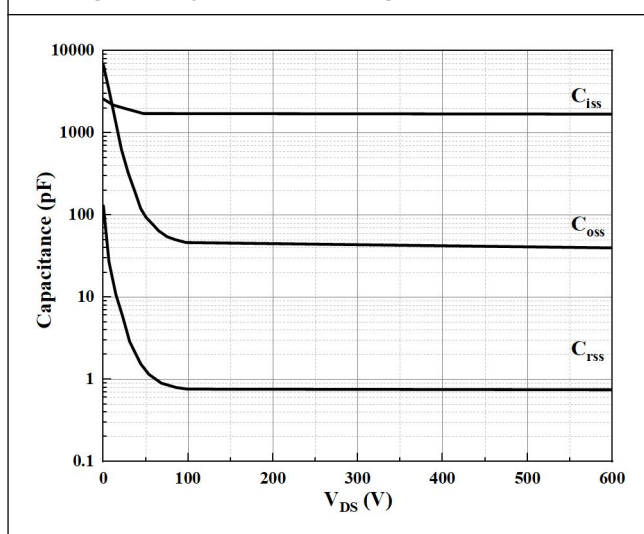


Figure 5. Typical Capacitance


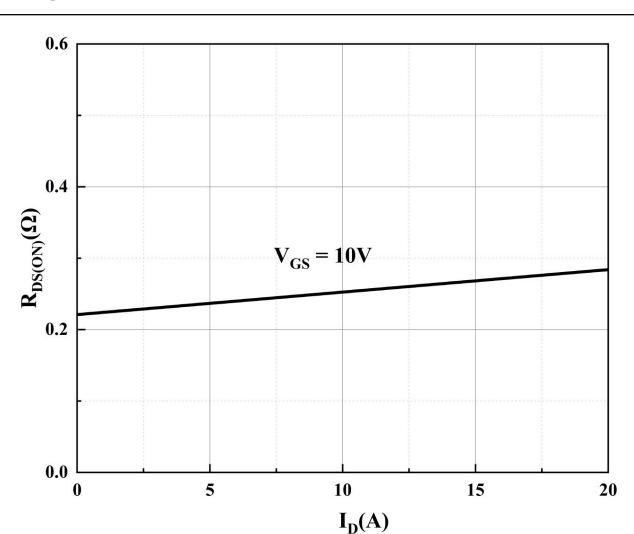


Figure 6. Drain-Source On-State Resistance

■ Characteristic Curve

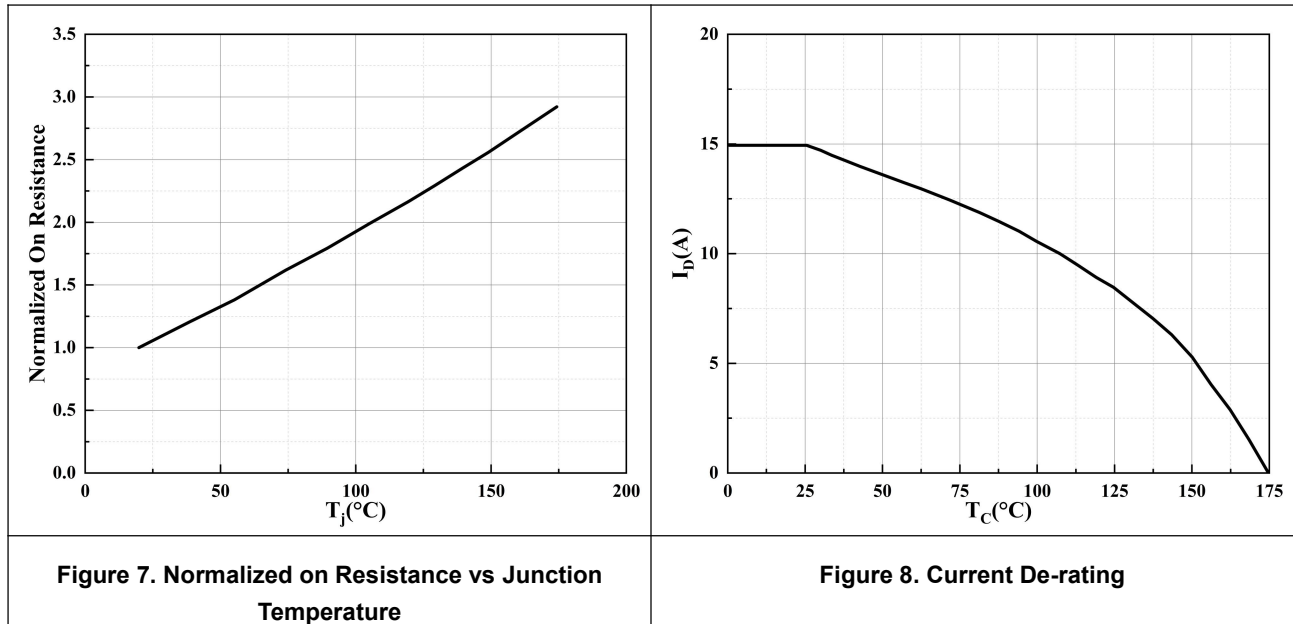

■ Package Information

TO-220F

