

■ Features

- High isolation 3750 VRMS
- AC input with transistor output
- Operating temperature range - 55 °C to 100 °C
- RoHS & REACH Compliance
- Halogen free
- MSL class 1
- Regulatory Approvals
 - UL - UL1577
 - VDE - EN60747-5-5(VDE0884-5)
 - CQC – GB4943.1-2022


■ Applications

- Switch mode power supplies
- Programmable controllers
- Household appliances
- Office equipment

■ Description

The MP3H4 series combine two AlGaAs infrared emitting diode as the emitter which is optically coupled to a silicon planar Phototransistor detector in a plastic SSOP4 Package. With the robust coplanar double mold structure, MP3H4 series provide the most stable isolation feature.

■ Schematic

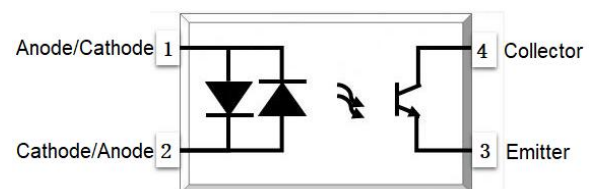



MP3H4 Series
SSOP4, AC Input, Photo Transistor Coupler

ABSOLUTE MAXIMUM RATINGS				
PARAMETER	SYMBOL	VALUE	UNIT	NOTE
INPUT				
Forward Current	I_F	± 60	mA	
Peak Forward Current	I_{FP}	± 1	A	1
Input Power Dissipation	P_i	100	mW	
OUTPUT				
Collector - Emitter Voltage	V_{CEO}	80	V	
Emitter - Collector Voltage	V_{ECO}	6	V	
Collector Current	I_c	50	mA	
Output Power Dissipation	P_o	150	mW	
COMMON				
Total Power Dissipation	P_{tot}	200	mW	
Isolation Voltage	V_{iso}	3750	V _{rms}	2
Operating Temperature	T_{opr}	-55~110	°C	
Storage Temperature	T_{stg}	-55~125	°C	
Soldering Temperature	T_{sol}	260	°C	

Note 1. AC For 1 Minute, R.H. = 40 ~ 60%

Note 2. For 10 seconds




MP3H4 Series
SSOP4, AC Input, Photo Transistor Coupler

ELECTRICAL OPTICAL CHARACTERISTICS at Ta=25°C							
PARAMETER	SYMBOL	MIN	TYP.	MAX.	UNIT	TEST CONDITION	NOTE
INPUT							
Forward Voltage	V _F	-	-	1.4	V	IF=10mA	
Input Capacitance	C _{in}	-	10	-	pF	V=0, f=1kHz	
OUTPUT							
Collector Dark Current	I _{CEO}	-	-	100	nA	VCE=20V, IF=0	
Collector-Emitter Breakdown Voltage	BV _{CEO}	80	-	-	V	IC=0.1mA, IF=0	
Emitter-Collector Breakdown Voltage	BV _{ECO}	6	-	-	V	IE=0.1mA, IF=0	
TRANSFER CHARACTERISTICS							
Current Transfer Ratio	MP3H4	CTR	20	-	400	IF=1mA, VCE=5V	
	MP3H4A		50	-	150		
	MP3H4B		80	-	400		
CTR Symmetry		0.7	-	1.3		IF=±1mA, VCE=5V	
Collector-Emitter Saturation Voltage	V _{CE(sat)}	-	0.07	0.2	V	IF=20mA, IC=1mA	
Isolation Resistance	R _{ISO}	10 ¹²	10 ¹⁴	-	Ω	DC500V, 40 ~ 60% R.H.	
Floating Capacitance	C _{IO}	-	0.4	1	pF	V=0, f=1MHz	
Response Time (Rise)	t _r	-	-	18	μs	VCE=2V, IC=2mA RL=100Ω	3
Response Time (Fall)	t _f	-	-	18	μs		3


Note 3. Fig.12&13

Note 4. Fig.14


CHARACTERISTIC CURVES

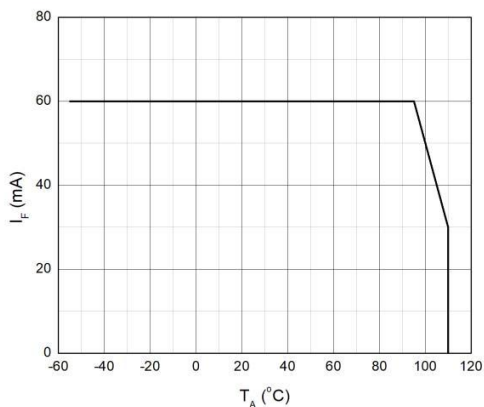


**Fig.1 Forward Current
vs. Ambient Temperature**

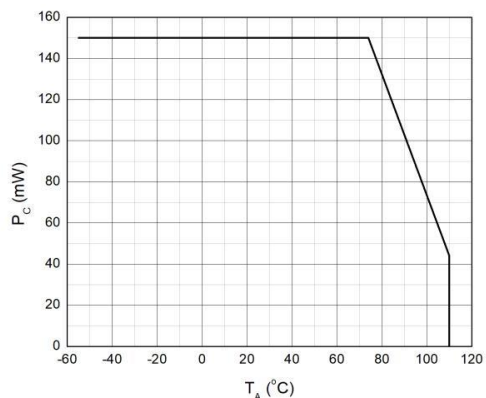


**Fig.2 On-state Terminal Current
vs. Ambient Temperature**

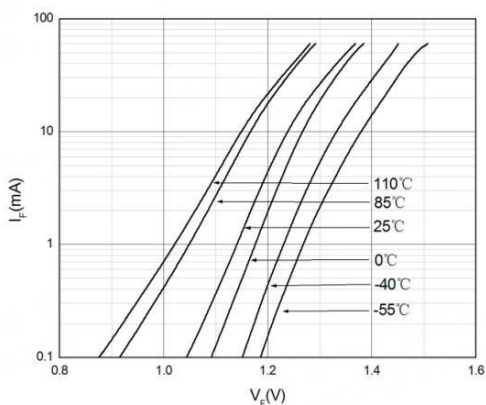


**Fig.3 Forward Current
vs. Forward Voltage**

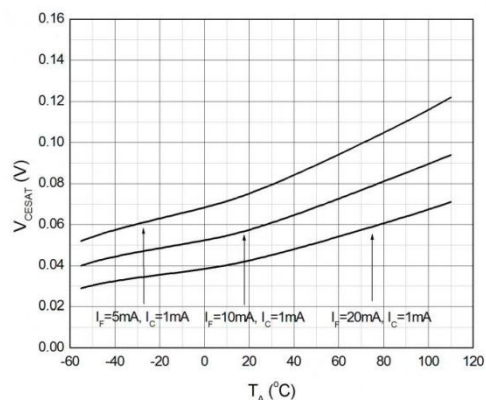

**Fig.4 Off-state Terminal Current
vs. Ambient Temperature**

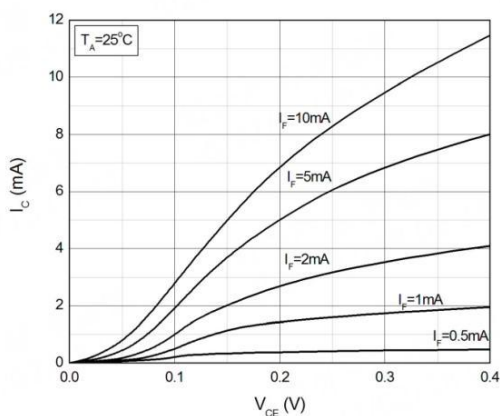

**Fig.5 Collector Current
vs. Collector-emitter Voltage**

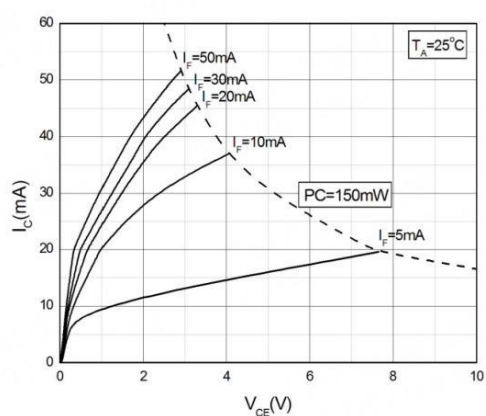

**Fig.6 Collector Current
vs. Collector-emitter Voltage**

CHARACTERISTIC CURVES

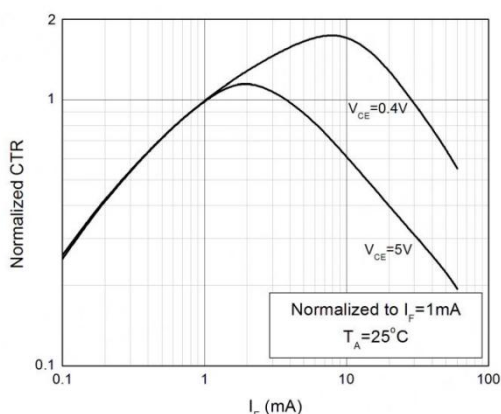


Fig.7 Collector Dark Current vs. Ambient

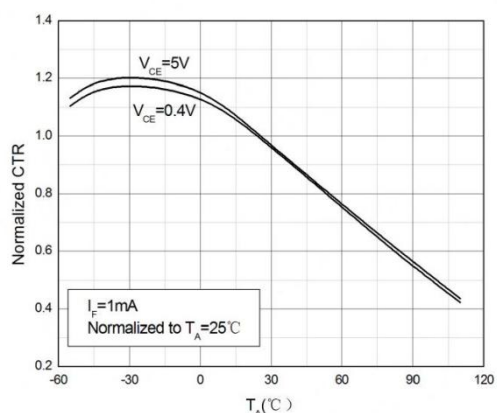


Fig.8 Switching Time vs. Load Resistance

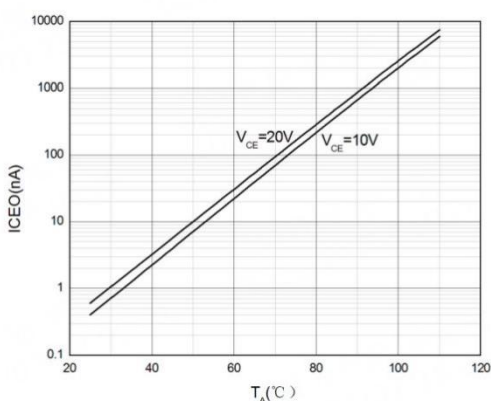


Fig.9 On-state Terminal Voltage vs. On-state Terminal Current

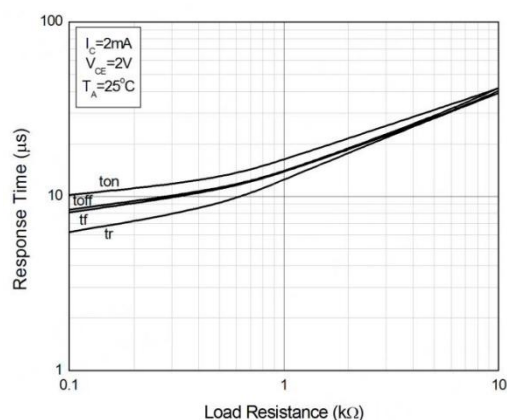


Fig.10 Holding Current vs. Ambient Temperature

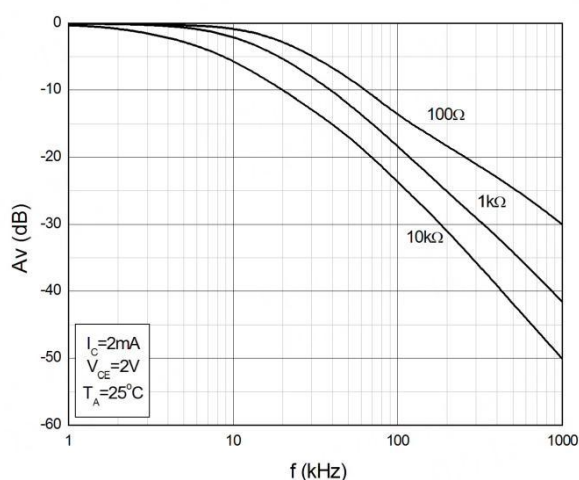


Fig.11 Frequency Responses

TEST CIRCUITS

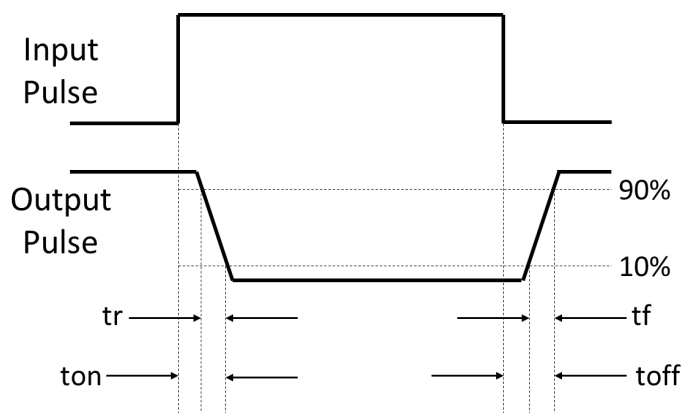
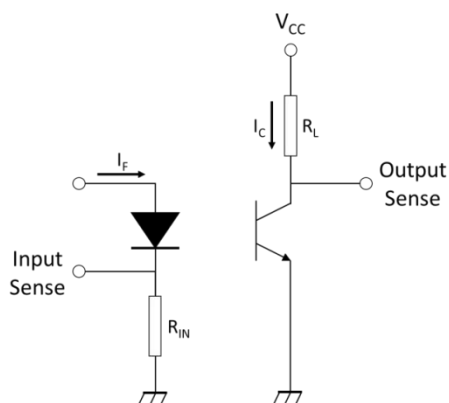


Fig.12 Test Circuits of Response Time

Fig.13 Curves of Response Time



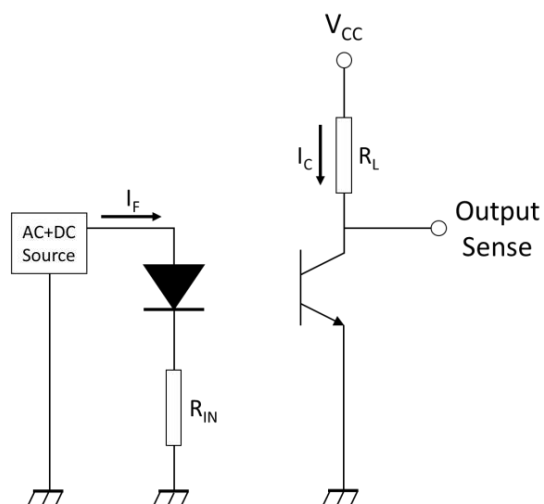


Fig.14 Test Circuits of Frequency Response

PACKAGE DIMENSIONS (Dimensions in mm unless otherwise stated)

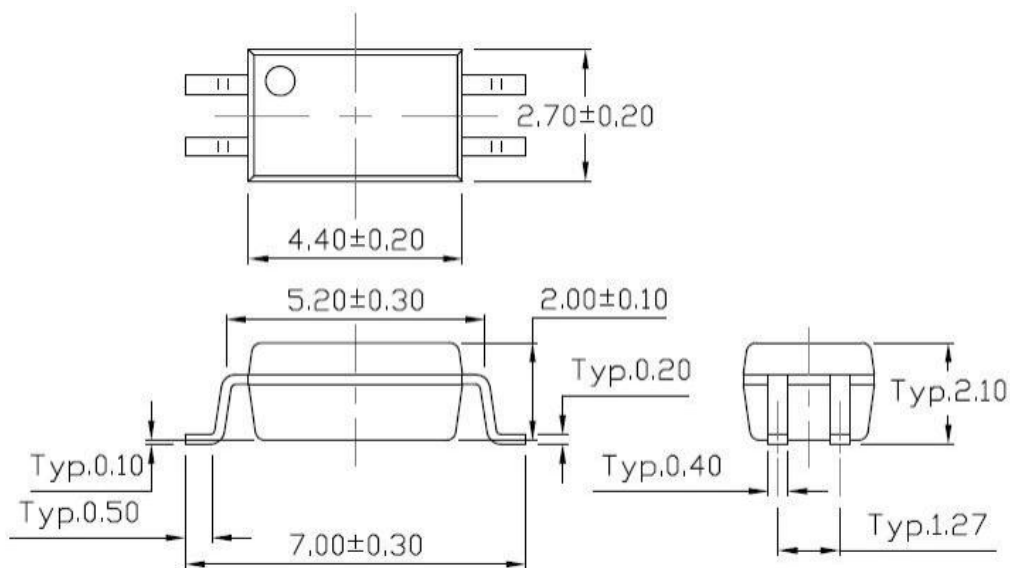


Recommended Solder Mask (Dimensions in mm unless otherwise stated)

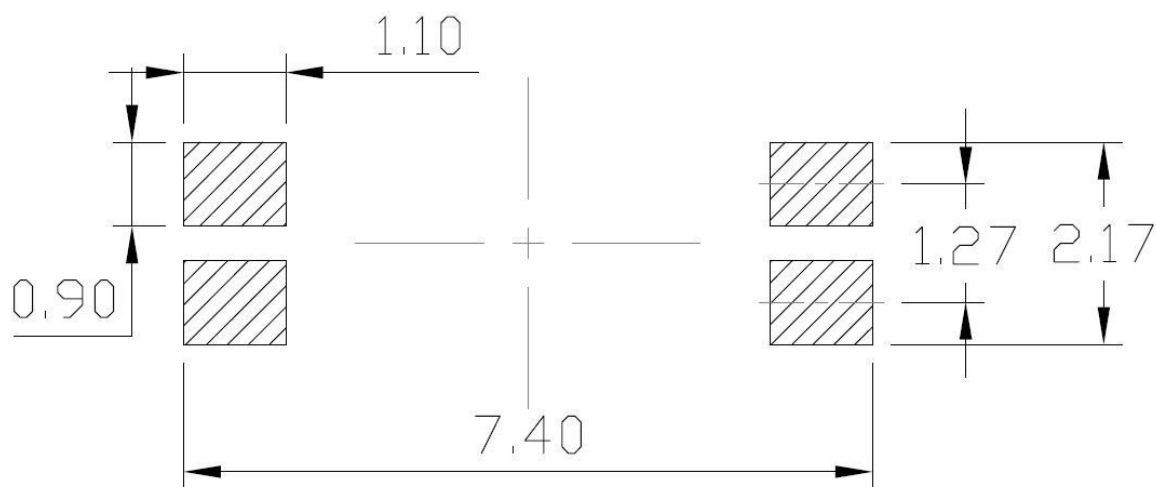


CARRIER TAPE SPECIFICATIONS (Dimensions in mm unless otherwise stated)

Option T1

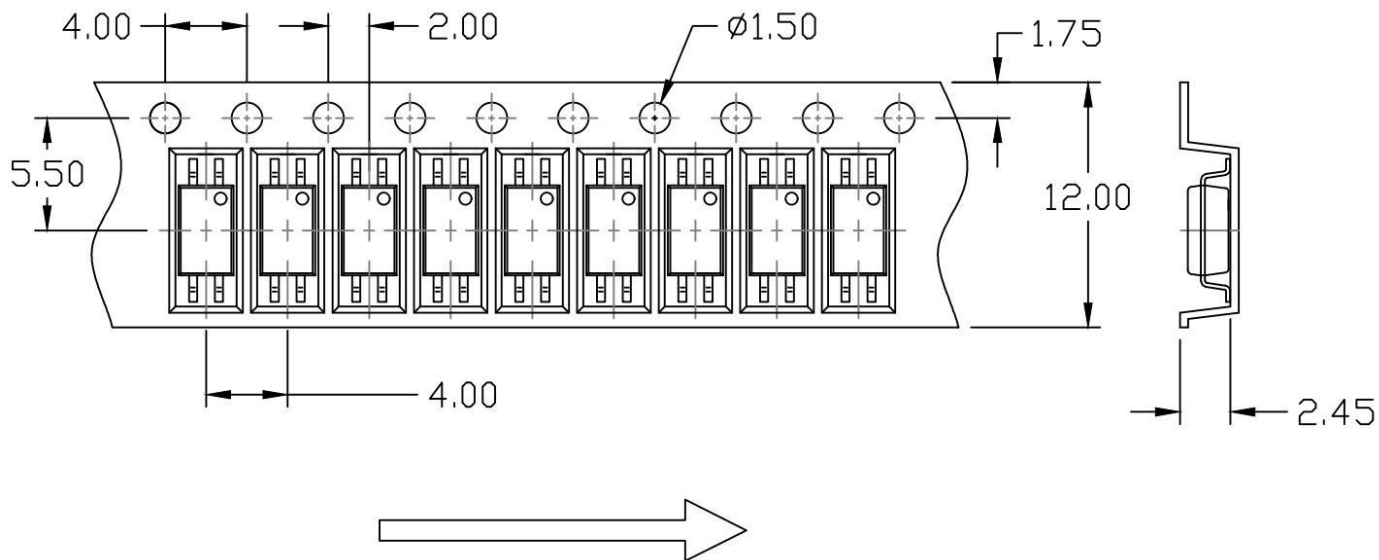


Option T2

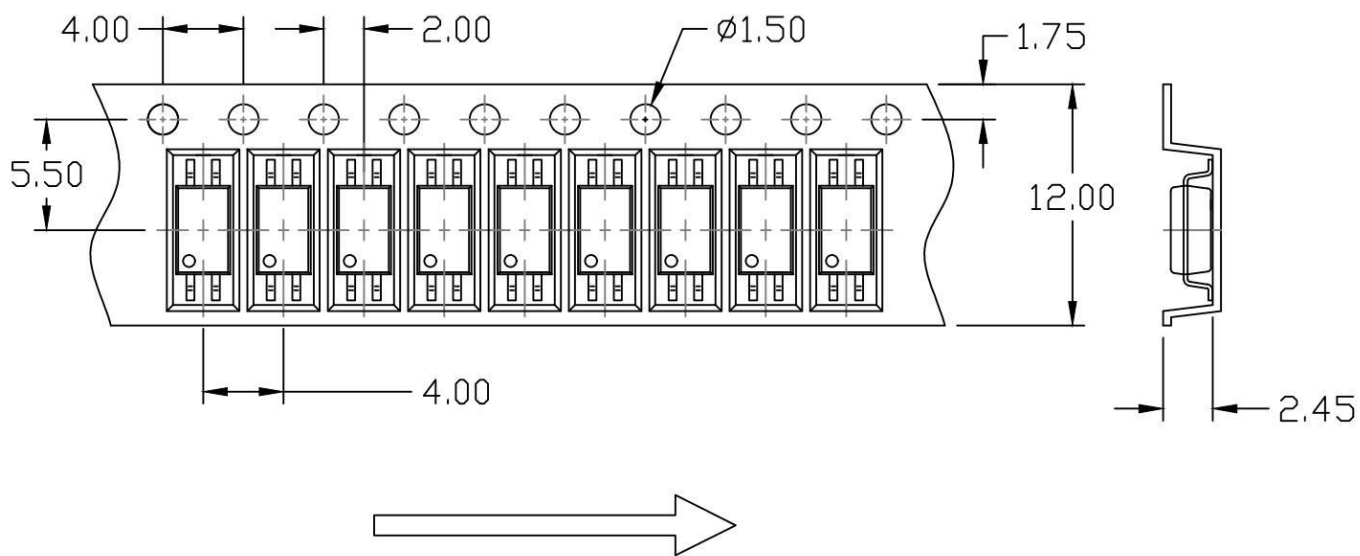

ORDERING AND MARKING INFORMATION

MARKING INFORMATION

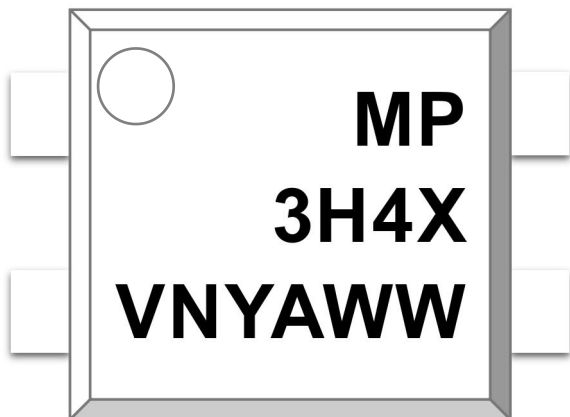

MP :Company Abbr.
3H4 :Part Number
X :CTR Rank
V :VDE Option
N : Version Number or None
Y :Fiscal Year
A :Manufacturing Code
WW :Work Week

ORDERING INFORMATION

MP3H4X(Z)-GV(XN)


MP – Company Abbr.
 3H4 – Part Number
 X – CTR Rank (A/B or None)
 Z – Tape and Reel Option (T1/T2)
 G – Material Option (G: Green, None: Non-Green)
 V – VDE Option (V or None)
 X – Rank (A~Z or None)
 N –Version Number (0~9 or None)

PACKING QUANTITY

Option	Quantity	Quantity – Inner box	Quantity – Outer box
T1	3000 Units/Reel	3 Reels/Inner box	5 Inner box/Outer box = 45k Units
T2	3000 Units/Reel	3 Reels/Inner box	5 Inner box/Outer box = 45k Units

REFLOW INFORMATION

REFLOW PROFILE

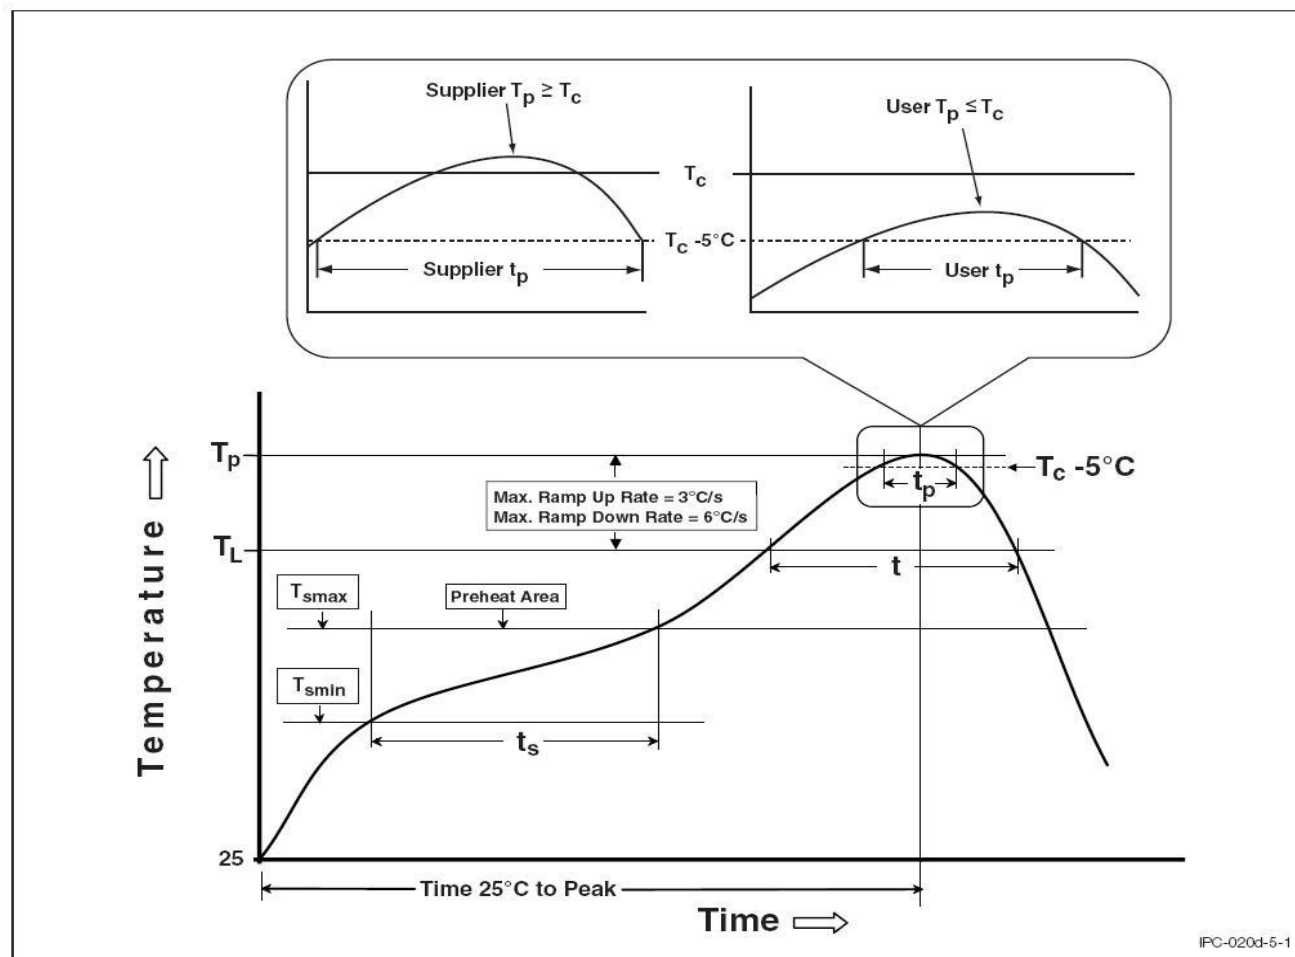

IPC-020d-5-1

Profile Feature	Sn-Pb Assembly Profile	Pb-Free Assembly Profile
Temperature Min. (T _{smin})	100	150°C
Temperature Max. (T _{smax})	150	200°C
Time (t _s) from (T _{smin} to T _{smax})	60-120 seconds	60-120 seconds
Ramp-up Rate (t _L to t _P)	3°C/second max.	3°C/second max.
Liquidous Temperature (T _L)	183°C	217°C
Time (t _L) Maintained Above (T _L)	60 – 150 seconds	60 – 150 seconds
Peak Body Package Temperature	235°C +0°C / -5°C	260°C +0°C / -5°C
Time (t _P) within 5°C of 260°C	20 seconds	30 seconds
Ramp-down Rate (T _P to T _L)	6°C/second max	6°C/second max
Time 25°C to Peak Temperature	6 minutes max.	8 minutes max.



DISCLAIMER

- Our company is continually improving the quality, reliability, function and design. Our company reserves the right to make changes without further notices.
- The characteristic curves shown in this datasheet are representing typical performance which are not guaranteed.
- This product is not intended to be used for military, aircraft, automotive, medical, life sustaining or lifesaving applications or any other application which can result in human injury or death.
- Immerge unit's body in solder paste is not recommended.
- Discoloration might be occurred on the package surface after soldering, reflow or long-time use. It neither impacts the performance nor reliability.

■ Revision History

Version	Date	Subjects (major changes since last revision)
0.1	2023-07-05	Datasheet Complete
0.2	2023-08-09	Datasheet Upgrade
1.0	2025-04-09	Datasheet Upgrade