


Features

- ◆ -30V, -130A, $R_{DS(on)}$ (Typ.) = 1.9m Ω @ $V_{GS} = -10V$
- ◆ Low Gate Charge
- ◆ 100% UIS Tested, 100% DVDS Tested
- ◆ High Power and current handing capability

Application

- ◆ Load Switch
- ◆ IPWM Application
- ◆ Power Management

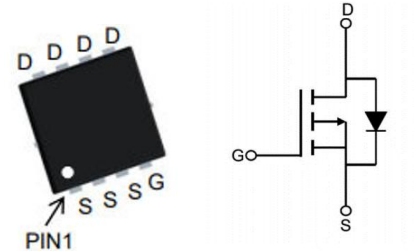

Absolute Maximum Ratings $T_c = 25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Rating	Unit
V_{DS}	Drain-Source Voltage ^a	-30	V
V_{GS}	Gate-Source Voltage	± 20	
I_D	Drain Current-Continuous	$T_C = 25^\circ\text{C}$	A
		$T_C = 100^\circ\text{C}$	
I_{DM}	Drain Current-Pulsed ^b	-520	
P_D	Maximum Power Dissipation, $T_C = 25^\circ\text{C}$	69.5	W
E_{AS}	Single Pulsed Avalanche Energy ^c	588	mJ
T_J, T_{STG}	Operating and Store Temperature Range	150, -55 to 150	$^\circ\text{C}$

Thermal Characteristics

Symbol	Parameter	Value	Unit
$R_{\theta JC}$	Thermal Resistance, Junction to Case	1.8	$^\circ\text{C/W}$
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient	TBD	

Electrical Characteristics $T_J = 25^\circ\text{C}$ unless otherwise noted

■ Off Characteristics

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{GS} = 0V, I_D = -250\mu A$	-30	-	-	V
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS} = -30V, V_{GS} = 0V$	-	-	-1.0	μA
I_{GSS}	Forward Gate Body Leakage Current	$V_{DS} = 0V, V_{GS} = \pm 20V$	-	-	± 100	nA

■ On Characteristics

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS} = V_{GS}$, $I_D = -250\mu A$	-1.0	-1.6	-2.5	V
$R_{DS(on)}$	Static Drain-Source On-Resistance ^d	$V_{GS} = -10V$, $I_D = -20A$	-	1.9	2.5	mΩ
		$V_{GS} = -4.5V$, $I_D = -20A$	-	2.7	3.6	

■ Dynamic Characteristics

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
R_G	Gate Resistance	$V_{DS} = V_{GS} = 0V$, $f = 1.0MHz$	-	1.8	-	Ω
C_{iss}	Input Capacitance	$V_{DS} = -15V$, $V_{GS} = 0V$, $f = 1.0MHz$	-	12.75	-	nF
C_{oss}	Output Capacitance		-	1330	-	pF
C_{rss}	Reverse Transfer Capacitance		-	1202	-	

■ On Characteristics

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
$t_{d(on)}$	Turn-On Delay Time	$V_{DD} = -15V$, $V_{GS} = -10V$, $R_L = 0.75\Omega$, $R_{GEN} = 3.0\Omega$	-	19.5	-	ns
t_r	Turn-On Rise Time		-	4.0	-	
$t_{d(off)}$	Turn-Off Delay Time		-	22.5	-	
t_f	Turn-Off Fall Time		-	37.4	-	
Q_g	Total Gate Charge	$V_{DS} = -15V$, $V_{GS} = -10V$, $I_D = -20A$	-	210	-	nC
Q_{gs}	Gate-Source Charge		-	24	-	
Q_{gd}	Gate-Drain Charge		-	31	-	

■ Drain-Source Diode Characteristics

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
I_S	Drain-Source Diode Forward Continuous Current	$V_G = V_D = 0V$, Force Current	-	-	-130	A
I_{SM}	Maximum Pulsed Current		-	-	-520	
V_{SD}	Drain-Source Diode Forward Voltage	$V_{GS} = 0V$, $I_S = -20A$	-	-	-1.2	V
T_{rr}	Body Diode Reverse Recovery Time	$I_F = -20A$, $dI_F/dt = -100A/\mu s$	-	39	-	ns
Q_{rr}	Body Diode Reverse Recovery Charge	$I_F = -20A$, $dI_F/dt = -100A/\mu s$	-	29.5	-	nC

Notes:

- $T_J = +25\text{ }^{\circ}C$ to $+150\text{ }^{\circ}C$.
- Repetitive rating: pulse width limited by maximum junction temperature.
- $L = 0.5mH$, $V_{DD} = -25V$, $I_{AS} = -48.5A$, $R_G = 25\Omega$ Starting $T_J = 25\text{ }^{\circ}C$.
- Pulse width $\leq 300\mu s$; duty cycle $\leq 0.5\%$.

Characteristic Curve

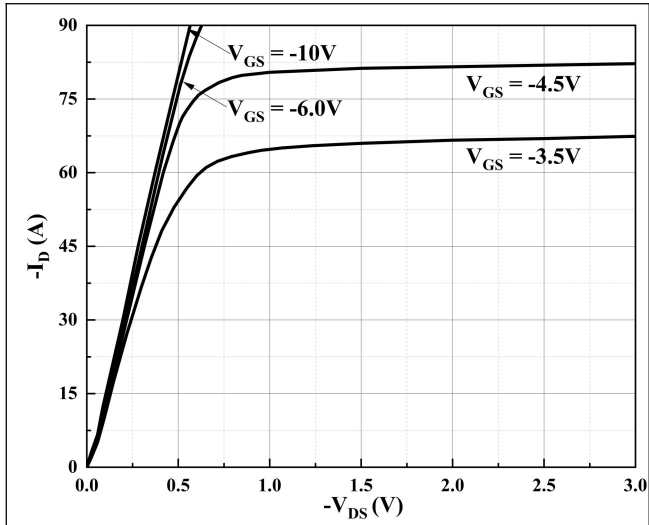


Figure 1. Typical Output Characteristics

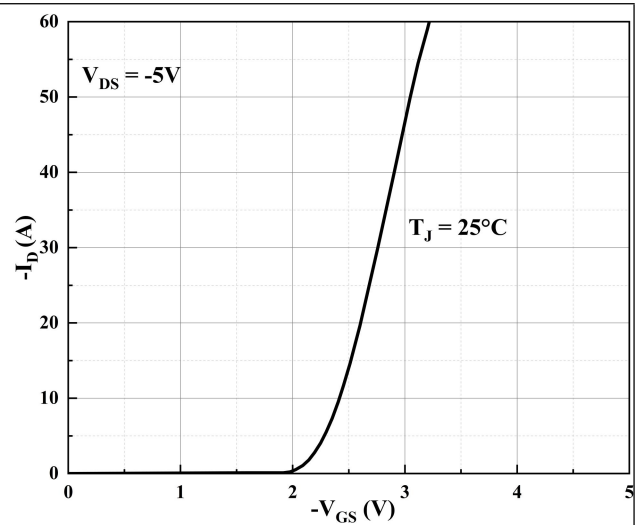


Figure 2. Typical Transfer Characteristics

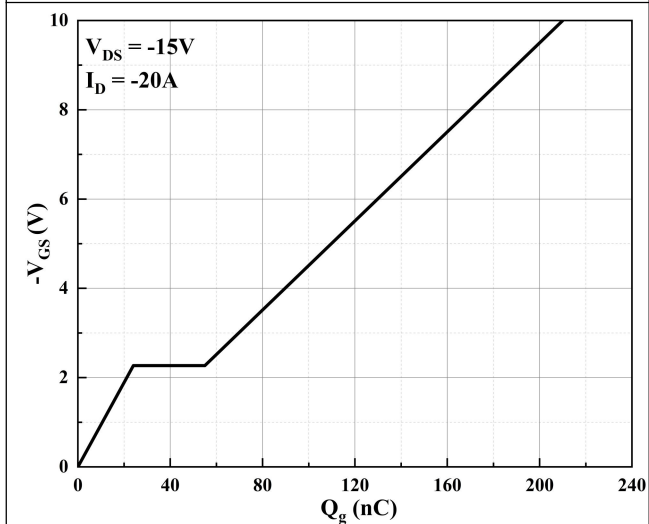


Figure 3. Typical Gate Charge

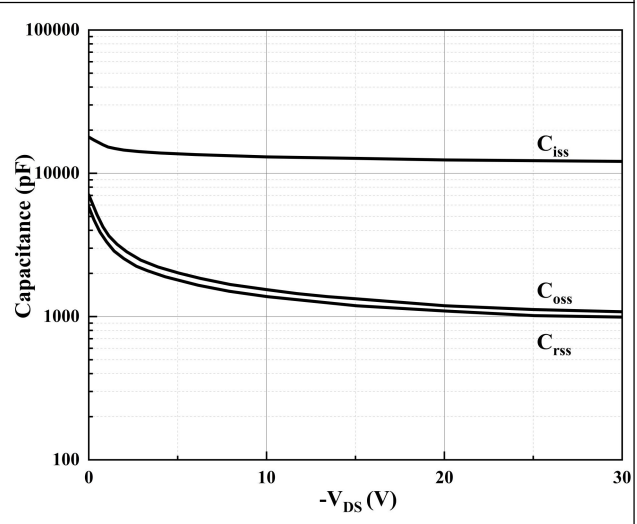


Figure 4. Typical Capacitance

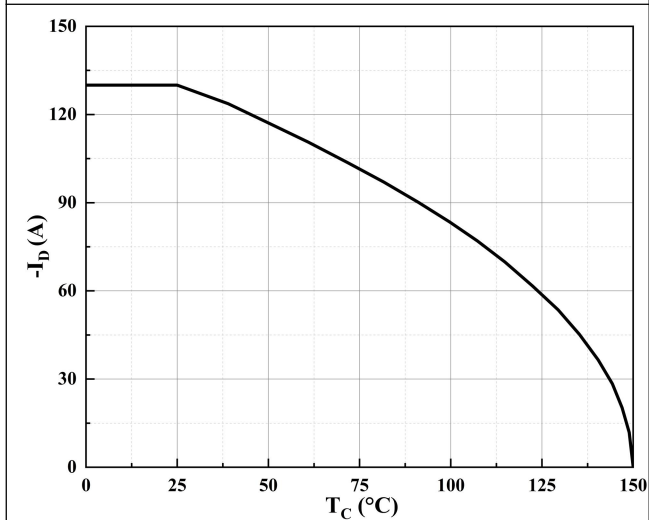


Figure 5. Maximum Continuous Drain Current vs. Case Temperature

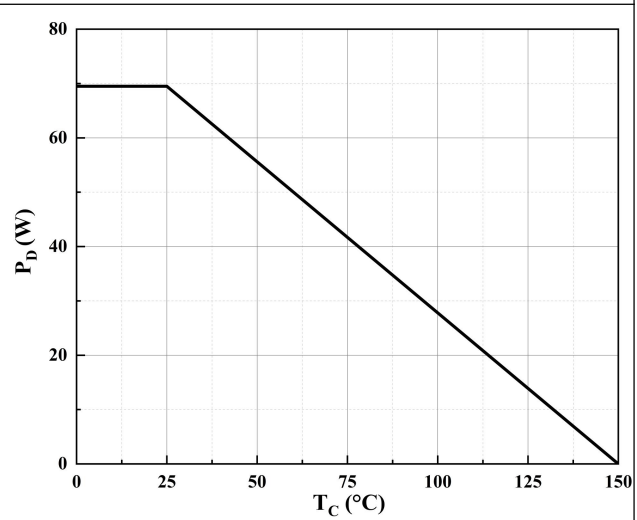


Figure 6. Maximum Power Dissipation vs. Case Temperature

■ Characteristic Curve

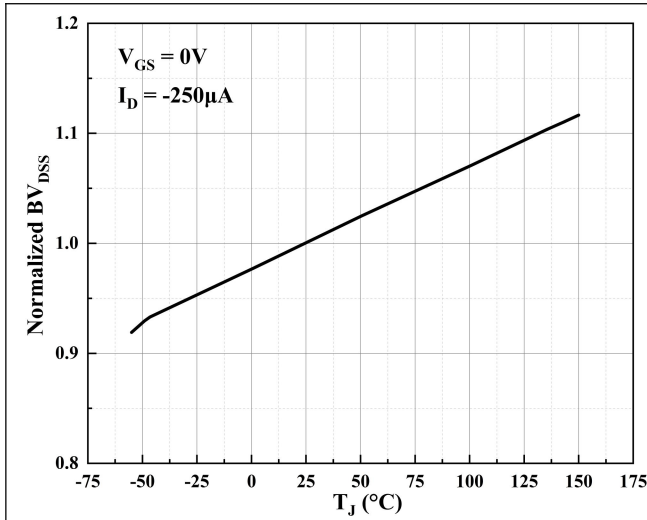


Figure 7. Normalized Drain-Source Breakdown Voltage vs. Junction Temperature

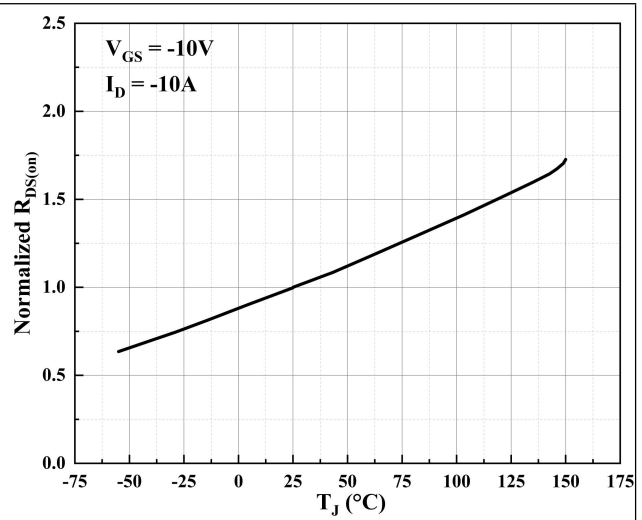


Figure 8. Normalized Static Drain-Source On-Resistance vs. Junction Temperature

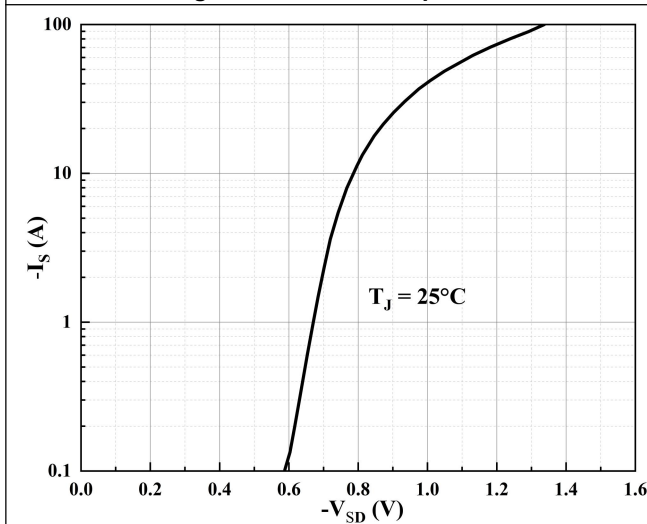


Figure 9. Body Diode Characteristics


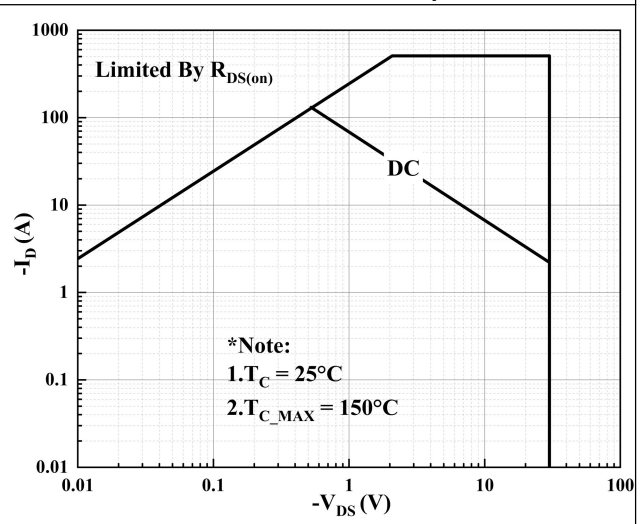


Figure 10. Maximum Safe Operating Area

■ Package Information

PDFN5×6

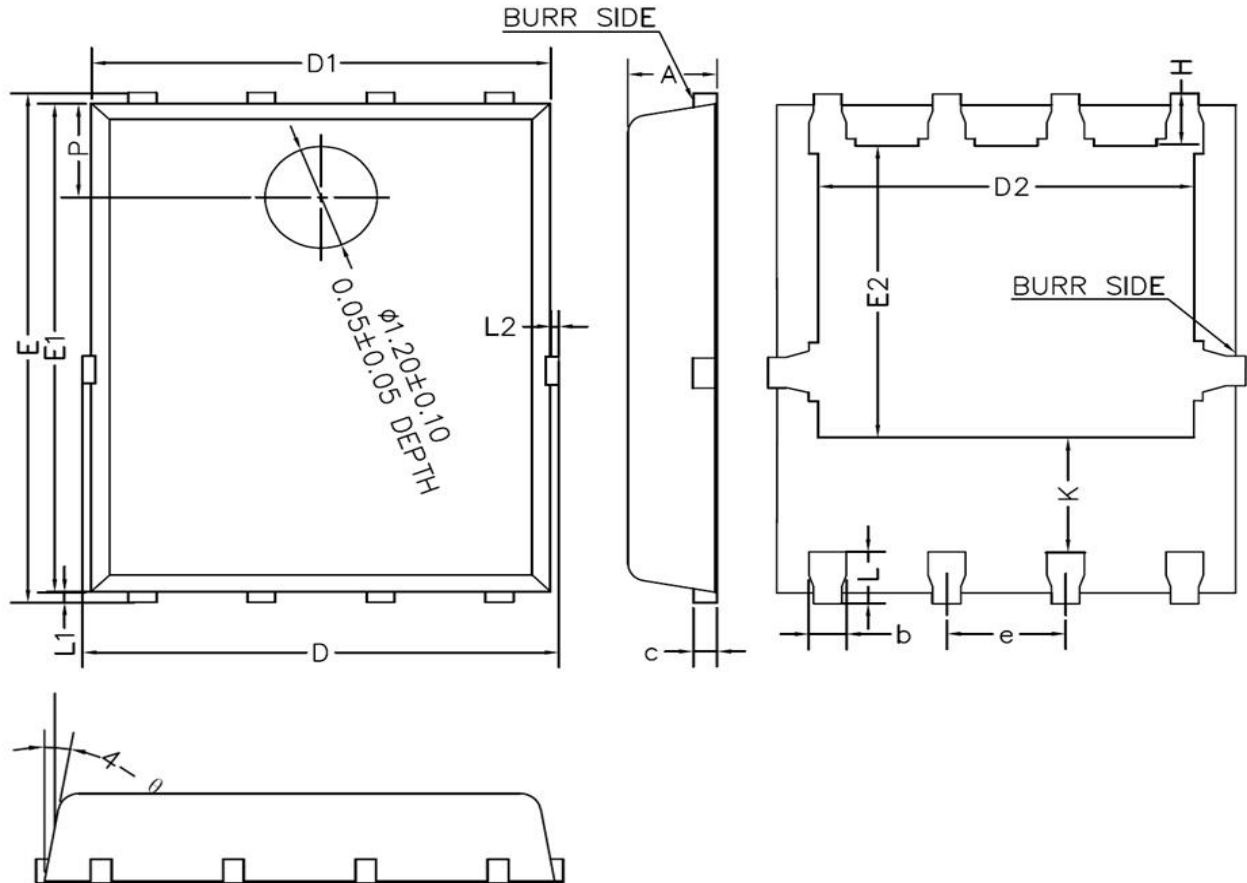

COMMON DIMENSIONS
(UNITS OF MEASURE=MILLIMETER)

SYMBOL	MIN	NOM	MAX
A	1.00	1.10	1.20
b	0.35	0.40	0.45
c	0.21	0.25	0.34
D	—	—	5.10
D1	4.90	4.95	5.00
D2	3.91	4.01	4.11
e	1.17	1.27	1.37
E	5.90	6.00	6.10
E1	5.70	5.75	5.80
E2	3.34	3.44	3.54
H	0.51	0.61	0.71
K	1.10	—	—
L	0.51	0.61	0.71
L1	0.06	0.13	0.20
L2	—	—	0.15
P	1.00	1.10	1.20
θ	8°	10°	12°