


Features

- ◆ Glass Passivated Chip
- ◆ High Surge Current Capability
- ◆ Low Reverse Leakage Current
- ◆ Case to Terminal Isolation Voltage 2500V

Application

- ◆ Induction Cooker
- ◆ Electric Welding Machine
- ◆ General Purpose Single-Phase Bridge Rectifier

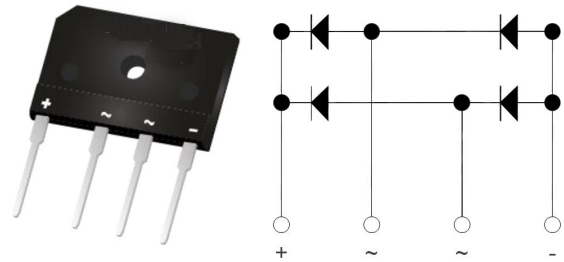

Machanical Data

- ◆ Case: Plastic Package
- ◆ Marking / Polarity: Marked on Body
- ◆ Weight: About 6.9 Grams

Maximum Ratings and Thermal Characteristics $T_A = 25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Rating	Unit
V_{RRM}	Recurrent Peak Reverse Voltage	1000	V
$I_{F(AV)}$	Average Forward Output Rectified Current, $T_A = 120^\circ\text{C}$	50	A
V_F	Maximum Forward Voltage Per Leg, $I_{FM} = 25\text{A}$	1.05	V
I_{FSM}	Peak Forward Surge Current Single Half Sine-wave Superimposed on Rated Load	620	A
I_R	Maximum DC Reverse Current at Rated DC Blocking Voltage	$T_A = 25^\circ\text{C}$	5.0
		$T_A = 125^\circ\text{C}$	500
i^2t	Rating for Fusing ($t < 8.3\text{ms}$)	1595	A^2S
V_{isol}	Rms Isolation Voltage from Case to Leads	2500	V
C_J	Typical Junction Capacitance	160	pF
$R_{\theta JC}$	Maximum Thermal Resistance Per Leg	0.8	$^\circ\text{C}/\text{W}$
T_J, T_{STG}	Operating Junction and Storage Temperature Range	-55 to 150	$^\circ\text{C}$

Notes:

- a. Junction to case with heatsink.
- b. Recommended mounting position is to bolt down on heatsink with silicone thermal compound for maximum heat transfer with M3 screw.

■ Characteristic Curve

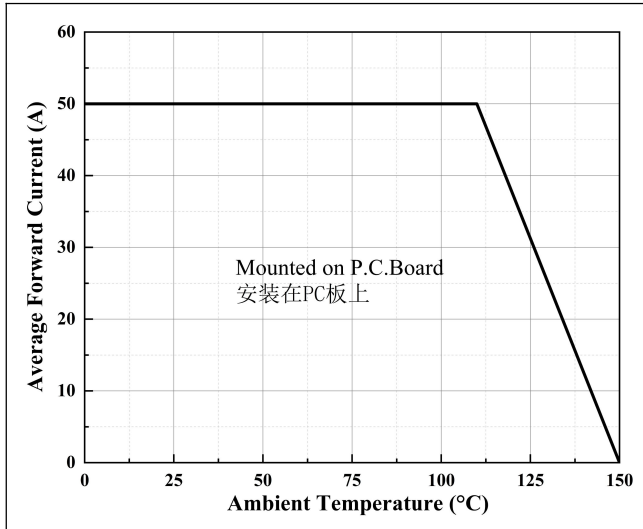


Figure 1. Forward Current Derating Curve

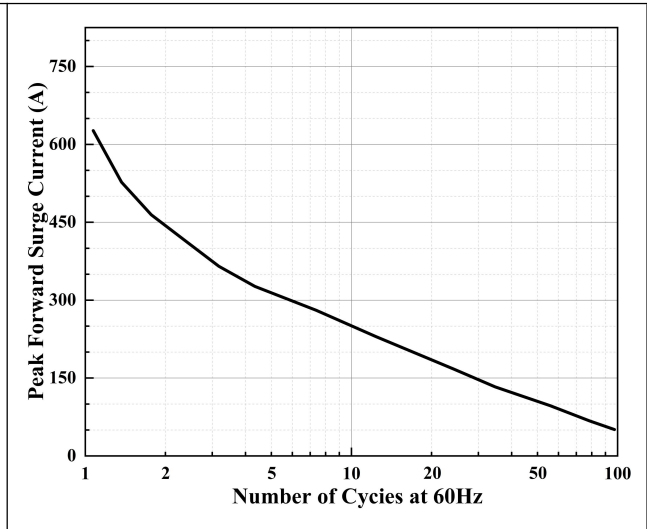


Figure 2. Maximum Non-Repetitive Surge Current

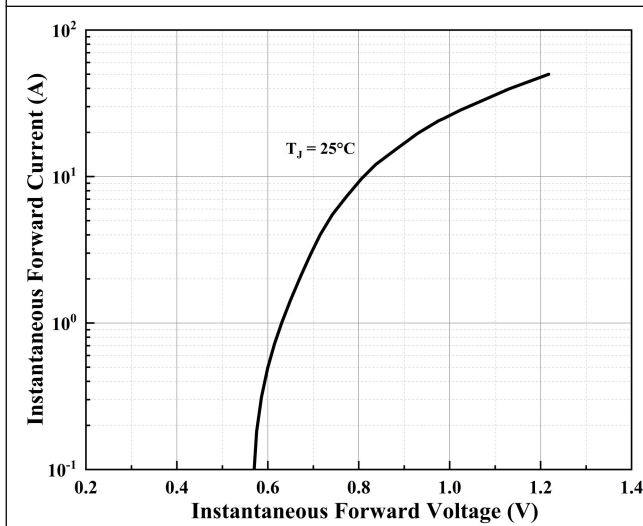


Figure 3. Typical Forward Characteristics Per Diode


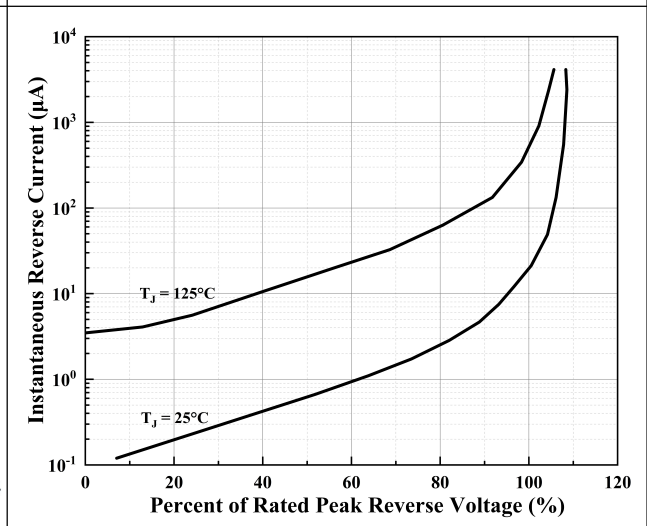


Figure 4. Typical Reverse Leakage Characteristics Per Diode

■ Package Information

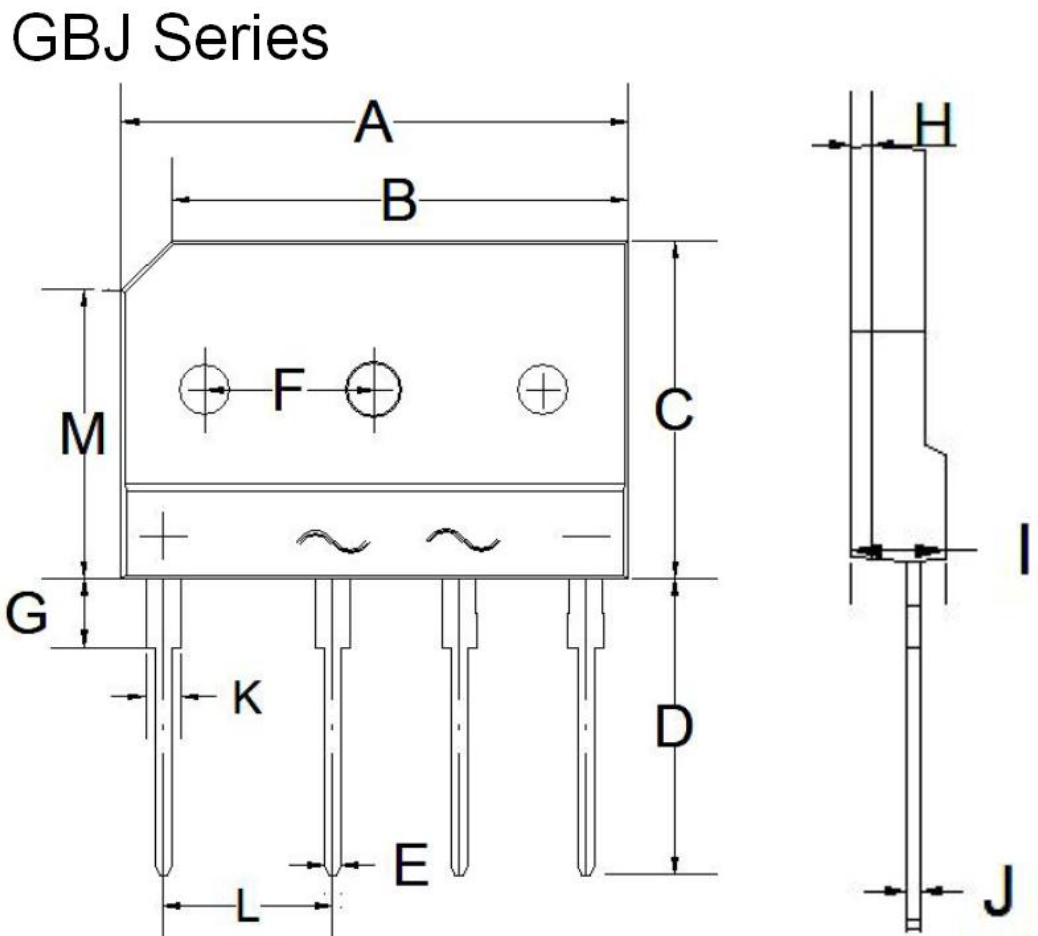

Item	Min (mm)	Max (mm)
A	29.80	30.20
B	24.68	28.68
C	19.80	20.20
D	17.40	17.80
E	0.95	1.05
F	9.80	10.20
G	3.90	4.20
H	0.85	1.30
I	4.40	4.80
J	0.50	0.80
K	1.80	2.40
L	9.80	10.20
M	16.40	17.00