


Features

- ◆ Glass Passivated Chip
- ◆ High Surge Current Capability
- ◆ Low Reverse Leakage Current
- ◆ Case to Terminal Isolation Voltage 2500V

Application

- ◆ Induction Cooker
- ◆ Switching Mode Power Supply
- ◆ Household Electric Appliances
- ◆ General Purpose Single-Phase Bridge Rectifier

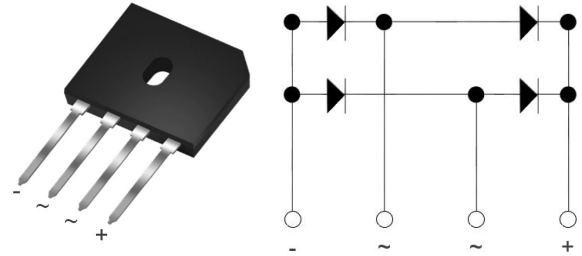

Machanical Data

- ◆ Case: Plastic Package
- ◆ Marking / Polarity: Marked on Body
- ◆ Weight: About 3.85 Grams

Maximum Ratings and Thermal Characteristics $T_A = 25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter		Rating	Unit
V_{RRM}	Recurrent Peak Reverse Voltage		1000	V
$I_{F(AV)}$	Average Forward Output Rectified Current, $T_A = 120^\circ\text{C}$		4.0	A
V_F	Forward Voltage Per Leg, $I_{FM} = 4.0\text{A}$		0.98	V
I_{FSM}	Peak Forward Surge Current Single Half Sine-wave Superimposed on Rated Load		125	A
I_R	Maximum DC Reverse Current at Rated DC Blocking Voltage	$T_A = 25^\circ\text{C}$	5.0	μA
		$T_A = 125^\circ\text{C}$	500	
i^2t	Rating for Fusing ($t < 8.3\text{ms}$)		64.8	A^2S
V_{isol}	Rms Isolation Voltage from Case to Leads		2500	V
C_J	Typical Junction Capacitance		38	pF
$R_{\theta JC}$	Maximum Thermal Resistance Per Leg		4.2	$^\circ\text{C/W}$
T_J, T_{STG}	Operating Junction and Storage Temperature Range		-55 to 150	$^\circ\text{C}$

Notes:

- a. Junction to case with heatsink.
- b. Recommended mounting position is to bolt down on heatsink with silicone thermal compound for maximum heat transfer with M3 screw.

■ Characteristic Curve

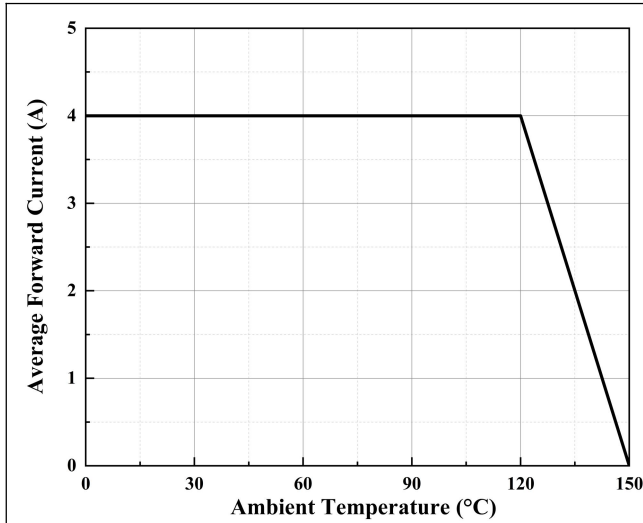


Figure 1. Forward Current Derating Curve

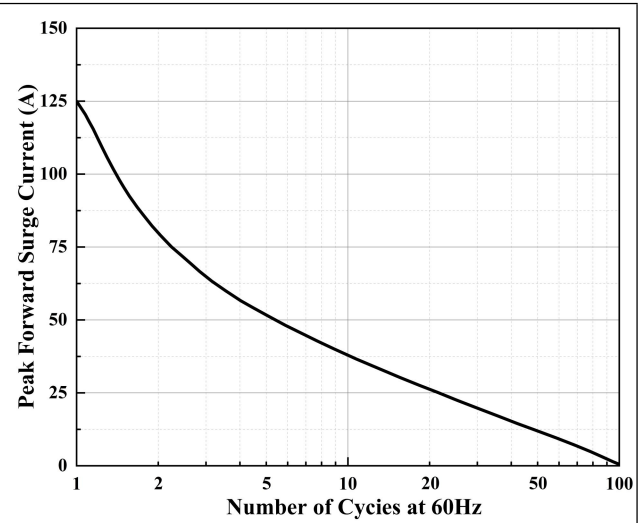


Figure 2. Maximum Non-Repetitive Surge Current

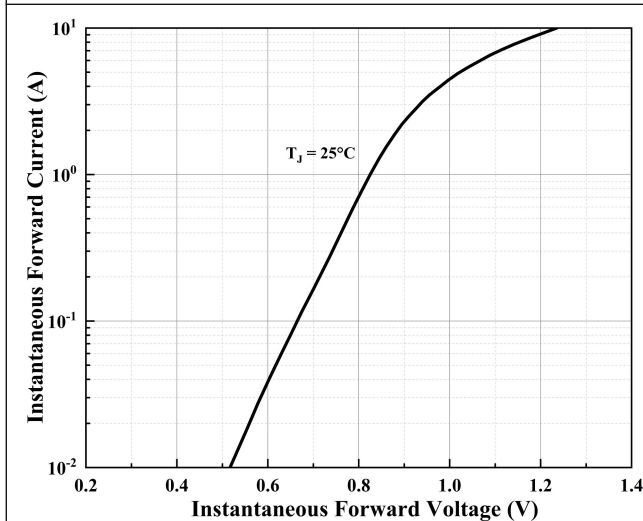


Figure 3. Typical Forward Characteristics Per Diode


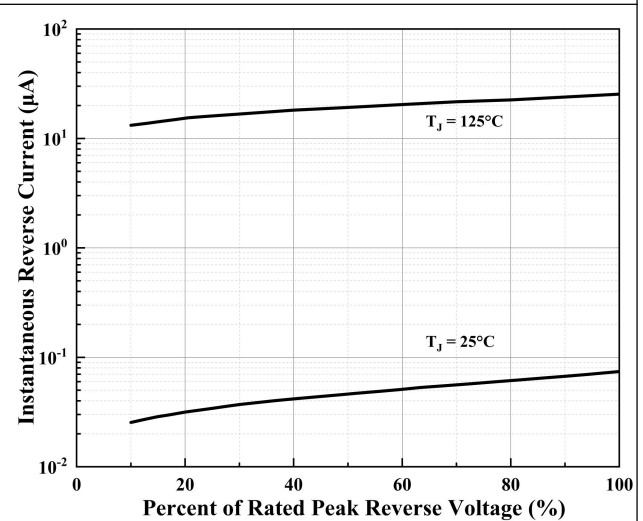


Figure 4. Typical Reverse Leakage Characteristics Per Diode

■ Package Information

Case: GBU Series

Dimensions in millimeters

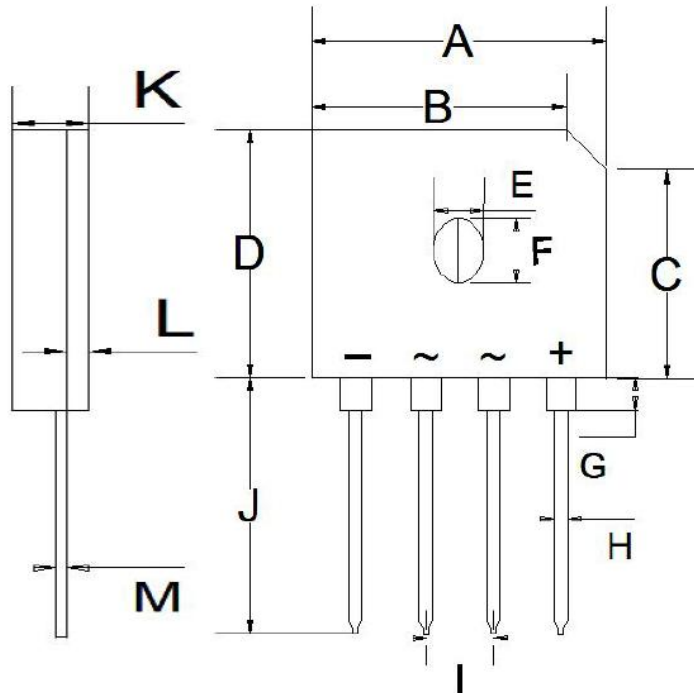

序号	Min(mm)	MAX(mm)
A	21.8	22.3
B	18.8	19.4
C	15.2	15.7
D	18.2	18.7
E	3.4	3.8
F	5.4	5.8
G	2.3	2.7
H	0.98	1.15
I	4.8	5.2
J	17.8	18.4
K	3.35	3.6
L	0.95	1.05
M	0.4	0.6